



A LITTLE ABOUT US

- Began manufacturing wood columns in 1963
- Added wood porch posts in 1969.
- The Architectural division was added in 1989.
- Introduced the Poly-Classic® Composite Products in 1994.
- PVC Craftsman's Products added in 2004.
- Introduced the DuraGlass™ Pultruded Products in 2006.

Architects and builders have chosen Turncraft columns because of our thoughtful design, exceptional materials, fine workmanship, superior assembly, and extensive selection. Precise historical research and authentic architectural specifications reflect our dedication to the quality you can expect from all of our products from in-stock columns to custom-built solutions.



TURNCRAFT PRODUCTS MADE IN THE U.S.A



DID YOU KNOW?

- All Turncraft products, wood and composite, are manufactured in the U.S.A. in our own factories.
- Our experienced craftsmen take extreme care and pride in the products we produce for our customers, all the way from making our own molds to the finished products.
- Turncraft provides the largest selection of products from any manufacturer. Period!
- All Turncraft products are designed to work together for perfectly matched columns regardless of the type of materials used.

12 800-423-3311



Table of Contents

How to select	
Poly-Classic® FRP Columns	10
Product Information	11 12 14 15 16 17
Poly-Classic® Durastone™	20 21
Poly-Classic® DuraGlass™ columns	2324
Poly-Classic® Porch Posts	26 27
Poly-Classic® Craftsman Columns Craftsman Introduction and E-Z Lock Tapered Shafts with Cap and Base Non-tapered Shafts with Cap and Base Pedestals and Newel Posts with Trim Ornamental Capitals	29 30 31 32 33 34
Turncraft Architectural Series Wood Species Available Greek Doric and Tuscan Specifications Roman Doric and Ionic Specifications Roman Corinthian Specifications Load Capacities and Plan Types Ornamental Capitals	37 38 39 40 40 41
Colonial Columns	44 45
Square Wood Columns	
Wood Porch Posts	49
Website	

How to Select

Your Turncraft Column or Post (or which Turncraft column or post is right for you)

To determine which product is the best for your project, you'll want to consider several things: location, style, size, and plan type. Not all styles, sizes or plan types are made in all materials.

All Turncraft products (except the Craftsman Series) are manufactured whole and are designed to be load bearing. If you need to wrap an existing load support, all of our columns are able to be split in half at the factory or by the installer and re-assembled, or they can be split to be used as pilasters.

Craftsman Series columns are square, tapered or non-tapered, and are shipped KD (knocked-down) to be assembled around an existing load support. Craftsman Series pedestals are unique in that they may be used to add a pedestal look to any existing column, or combined with any of our other products to create a pedestal/column look.

I. Determine the location:

Where this product will be used – interior or exterior. All of our products are fine for interior use. Wood may be a more familiar material to work with, but all products can be installed with standard carpentry techniques and tools.

Best for exterior: Poly-Classic® products (low maintenance, lifetime warranty, waterproof), and Turncraft Architectural cedar columns. A large selection of styles are available. Poly-Classic® products require painting (except Poly-Classic® Porch Posts).

II. Determine the column line:

FRP Poly-Classic® FRP Column:

Fiberglass reinforced polymer are virtually maintenance-free. They are impervious to temite and carpenter ant attack as well as staining and decaying fungi. High-humidity environments have no effect on these non-pororous, waterproof columns.



DST Poly-Classic® DuraStone™ Textured Paintable Column:

Available in all the same sizes as our paint grade FRP columns with Tuscan caps and bases. Paint any color to match any style.



DGL Poly-Classic® DuraGlass™ Column:

Resin-infused or pultruded fiberglass made from lightweight fiberglass, these columns are easy to cut, easy to install, and strong enough to carry heavy loads. DuraGlass™ columns are decay resistant and require little maintenance.



CRF Poly-Classic® Craftsman Series:

PVC–expanded cellular poly-vinyl-chloride are manufactured using expanded cellular PVC and can be trimmed, fastened and drilled with ordinary woodworking tools. Craftsman Series Columns are manufactured using our E-Z Lock Miter Joint that aids in assembly.



PCP Poly-Classic® Porch Post:

Galvanized steel square core and sturdy inserts at critical connection points. Constructed from seamless window grade vinyl with UV inhibitor. Delivered with matte white finish, but can be painted to match your project.

| 4 | 800-423-3311

ARC Turncraft Architectural:

Exterior columns are usually made of cedar or pine. Cedar have a 10 year limited warranty, and pine has a 1 year limited warranty. Exterior wood products require painting. Turncraft Architectural also provides our most complete selection of styles and sizes, including interior stain grade columns.

COL Colonial Column:

Used for interior and exterior installations. Column shafts are manufactured from finger-joint pine, and unless factory primed, are immersion treated in Woodlife® 111. Ready to prime and paint.



SWC Square Wood Column:

Used for interior and exterior installations. Column shafts are manufactured from finger-joint pine, and unless factory primed, are immersion treated in Woodlife® 111. Ready to prime and paint.



WPP Wood Porch Post:

Made from select kiln-dried finger-jointed woods, and are precision moulded, glued with Type-I waterproof glue. Sanded and primed with special sealer applied to bottom of post for easy installation.



III. Determine the style.

Perhaps most important, is of course style. This includes the classical orders of architecture: Greek Doric, Tuscan, Roman Doric, Ionic and Corinthian, with the addition of our own Colonial style. All round columns are available plain or fluted (except DuraGlass™), and most square columns are available plain, fluted or with panels.







BRING HOME THE ELEGANCE OF THE PARTHENON.

The Greek Doric Order is unique among column styles with its absence of a base and astragal. The column height in ratio to its diameter varies greatly when viewed in antiquity: the architectural proportions can range from four to six diameters. Normally fluted, the Greek Doric has twenty flutes, with no fillets, so the flutes come to a peak (arris flutes). The depth of the flute is approximately one-sixth of the flute width. Greek Doric columns are most commonly recognized as those found on the Parthenon in Athens.

Turncraft.com 5 |





Available in:

Poly-Classic® FRP (pages 10–19)



DuraStone™ *Textured FRP*

(pages 20-21)



DuraGlass™ Fiberglass

(pages 22-25)



Craftsman PVC

(pages 28–35)



Architectural Wood

(pages 28-35)

SIMPLICITY GIVES YOUR DESIGN CENTER STAGE.

The distinguishing characteristic of the Tuscan Order is simplicity. Seldom fluted, the minimal mouldings and stylishly clean lines provide a robust appearance. When used in true architectural proportions, the height of the column, including cap and base, is seven diameters. Tuscan columns in antiquity are found on the Temple of Piety in Rome.



Roman Doric

Available in:



Poly-Classic® FRP (pages 10-19)



Architectural Wood (pages 28-35)

CLASSIC DESIGN REACHES NEW HEIGHTS.

The Roman Doric order features an increase of decorative moulding over the Tuscan Order. Vignola's Denticulated Doric Cap has a stepped, three-fillet support of the echinus instead of the single-fillet support of the Tuscan Order. The Doric base is similar to the Tuscan, but the addition of a bead above the torus moulding is an elegant embellishment. According to Vignola, the height of the Doric Column, including cap and base, should be eight diameters. Vignola Denticulated Doric is imitated closely from the Roman Theater of Marcellus.

| 6 800-423-3311



Available in:



Poly-Classic® FRP (pages 10–19)



DuraStone™ *Textured FRP* (pages 20-21)



Craftsman PVC

(pages 28-35)



Architectural Wood (pages 28–35)

ADDED EMBELLISHMENTS CREATE IMPRESSIVE SPACES.

Embellishing the Ionic Order are ornate scrolls decorating the capital of the column. These scrolls derive their intriguing shape from the Nautilus shell. We include the Temple of Winds and Roman Doric Ornamental capitals, with their intricate designs, in

our Ionic styles. Most commonly, Ionic columns incorporate twenty-four flutes separated by fillets that are about one-half the flute width. Customarily, the Ionic Order column height, including capital and base, is nine diameters. A prime example of the Ionic Order as it was used in Rome is the Temple of Fortuna Virilis.





Available in:



Poly-Classic® FRP (pages 10–19)



DuraStone™ Textured FRP

(pages 20-21)



Craftsman PVC (pages 28-35)



Architectural Wood

(pages 28-35)



Columns of the Corinthian Order are crowned with an inverted bell-shaped capital. The capital is richly adorned with Acanthus leaves. This column is almost always fluted. Like the Ionic, the Corinthian column exhibits twenty-four flutes and an Attic Base. The height of Corinthian columns, including capital and base, is ten diameters. This is a common Roman order that was used on the Temple of Mars Ultor.



Turncraft.com 7 |







Craftsman PVC (pages 28-35)



DuraGlass™ *Fiberglass* (pages 22–25)

THE STYLE IS TIMELESS. NOW THE COLUMN IS TOO.

Born out of the understated, practical tradition of the early 1900's Arts and Crafts movement, the square tapered column has become popular in modern adaptations of the Craftsman, Prairie, Bungalow, Country, and Mission style homes of today. Also available non-tapered, this timeless style is manufactured from expanded cellular PVC for quick, easy assembly and virtually maintenance-free performance! Now you can recapture the simple, honest artistry of yesterday's craftsman with today's most advanced materials and construction techniques.



DuraStone™ Texture Available in:



DuraStone™ *Textured FRP* (pages 20-21)

ANCIENT STYLE MADE WITH MODERN MATERIALS Redesigned due to popular demand the DuraStone™ Textured Paintable Column gives you the look and feel of 2000 year old columns. From the factory in natural material finish you can match these textured columns to any style with your choice of paint color. Perfect for exterior or interior applications ...

8 | 800-423-3311

Colonial Wood

Available in:



Colonial Wood

(pages 42-45)

ELEGANT NEW WORLD ENHANCEMENTS FOR YOUR HOME.

As with many iconic Old World items, New World designers have taken the basic column concept and adorned it with a unique, more contemporary style. The Colonial style redefines the column with simplicity, yet retains the elegance desired to make bold statements for entryways and interiors. Available smooth or fluted, the entire line of ornamental capitals is also available for personalizing the column to fit any décor.



Porch Posts

Available in:



Porch Posts Wood (pages 46-47)



PCP Porch Posts Vinyl (pages 26-27)

AN ALL-AMERICAN DECORATIVE TRADITION.

When a column would simply be too much, but a decorative touch is essential, a Porch Post from Turncraft would be the perfect choice. Often featured on Farmhouse and Country style houses with their spacious porches, and Victorian homes with their intricate details, the Colonial pattern is a traditional favorite. Porch Posts add charm and personality to walkways, landings, decks, and porches. There is nothing like the beauty of a Porch Post to add distinction and character to any home.



Turncraft.com



POLY-CLASSIC®

FRP FRP Columns

- STRONGEST COLUMN AVAILABLE
- LOW MAINTENANCE
- WIDE ARRAY OF OPTIONS
- CAN BE SPLIT FOR REASSEMBLY

- LIMITED LIFETIME WARRANTY
- READY TO PRIME AND PAINT
- EXTERIOR OR INTERIOR USE
- MADE WITH FLAME GUARD™

10 800-423-3311

POLY-CLASSIC® FRP COLUMNS

Turncraft Poly-Classic® FRP Columns are the product of choice for homeowners and builders who demand beauty, value, and performance. Poly-Classic® FRP Columns are architecturally proportioned from rotocast fiberglass-reinforced polymer — the most advanced construction material in the world — so pound for pound they are stronger than concrete, steel, or aluminum.

NOW WITH FLAME GUARD

Poly-Classic® FRP Columns were the first fiberglass-reinforced polymer columns to achieve the distinction of passing an industry test (ASTME, 84-01) that measures the flame spread and smoke development of building components in a fire.


	rncraft Poly-Classic [®] FRF h Flame Guard set a new									
	Flame Spread Index (FSI)	Smoke Developed Index (SDI)								
Industry Standard for FRP Columns	70-85	900-1025								
Turncraft Poly-Classic® Columns	15*	335**								
*Achieving Class I Flame-Spread classification under 1997 uniform fire code. **Well below the allowable SDI index of 450.										

LIMITED LIFETIME WARRANTY

Poly-Classic® FRP Columns are virtually maintenance-free. They are impervious to termite and carpenter ant attack as well as staining and decaying fungi. High-humidity environments have no effect on these nonporous, waterproof columns. All Turncraft Poly-Classic® Columns are covered by a limited lifetime warranty to the original purchaser. Warranty details are available from your distributor or our website-www.Turncraft.com.

PLAN TYPES

Poly-Classic® FRP Columns are available in the plan types below. Please specify when you order. (Fractional components shown are typical. Customer may specify actual returns, wall thicknesses, etc.)

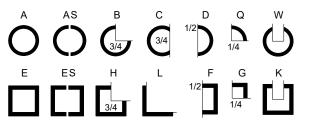



Round Smooth

Fluted

Square Smooth

Fluted

Square Paneled

Square Recessed Panel

Square with Pedestal


TURNCRAFT EXCLUSIVES PRODUCTS

TIMESAVER CAP AND BASE

New to the Turncraft product line, our 8" Square TimeSaver Cap and Base employs the same Quick-Fit installation pressure tabs as our round 8", 10", and 12" TimeSaver products.

Our TimeSaver cap and base offers the easiest and quickest installation in the industry.






- Designed for use on round FRP columns in 8", 10", and 12" sizes
- Made with 95% recycled material
- Extremely strong and durable
- Self aligning with no fasteners
- · Excellent paint adhesion
- Fast installation



TIMESAVER RAILING ADAPTER BRACKET

Our TimeSaver railing adapter bracket solves the age old problem of attaching a railing system to the decorative base of a round column. Simply use one of these new brackets to make an attractive attachment to our 8", 10", and 12" round Tuscan bases. Brackets are available in two different heights, allowing them to be used with just about any railing system on the market.

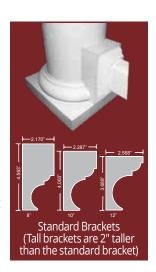

NEW! COPPER OR ALUMINUM FLASHING

Turncraft is now offering real flashing for our most popular sizes of columns - the 8", 10", and 12" round and square Poly-Classic® FRP columns with Tuscan caps. Flashing is available in either copper or aluminum. Flashing is 3/4" larger than abacus size, to be folded over the edges of the cap, held in place

with construction adhesive (not supplied). Flashing for other sizes and styles of caps are available. Call for more information.



INSTALL KIT

For structural FRP columns, the install kit consists of 4 ABS brackets (2 for top of column and 2 for bottom) and fasteners required for standard installation. We recommend 2 kits for



columns 16" and up: this will allow the installer to use 4 brackets at the top and bottom of the column. When installed, the cap and base will conceal these brackets and hardware.

SPLIT KIT

Each kit contains six nylon locking straps with 1/8" spacers and one quart (1.85 lb.) automotive body filler. For columns over 12 foot in height, two kits will be required per column.



Turncraft recommends

using an abrasive (Carborundum or similar) or carbide blade to trim the shaft. Split columns are not load bearing.


| 12 | 800-423-3311

ROUND TAPERED AND NON-TAPERED COLUMNS

Available fluted and unfluted in a wide range of sizes. Flutes in most 8", 10", and 12" diameter tapered shafts are molded right into the shaft, providing consistent lonic fluting. All sizes can also be custom-fluted for specific opening heights, and adjusted for the cap and base chosen. When shafts are custom fluted, typically the flutes end 1" from the top of the base.

		Таре	ered F	Round	FRP	Shaft	s Ava	ilable	Heig	hts ar	nd Loa	ad Ca	pacities	
Column Bottom Diameter ‡	5'	6'	8'	9'	10'	12'	14'	16'	18'	20'	22'	24'	Concentric Load *	Eccentric Load *
6"													6,000 lb.	6,000 lb.
8"			å	å	å								10,000 lb.	6,600 lb.
10"			å	å	å	å							14,000 lb.	10,720 lb.
12"		1	å	å	å	å		å					18,000 lb.	13,200 lb.
14"			1	1	1	1		1	1	1			20,000 lb.	11,520 lb.
16"	1	V	V	1	1	1	1	1	V	V			20,000 lb.	13,200 lb.
18"			1	1	1	1	1	V	1	1	1	1	20,000 lb.	9,040 lb.
20"		V	V		1	1	1	V	V	V			20,000 lb.	18,960 lb.
24"			1		1	1			1	1	V	1	20,000 lb.	13,200 lb.
30"	30" Available in DuraGlass™. Please see page 25.												25,000 lb.	n/a

No	on-Tape	red Rou	ınd Shat	fts Availa	able Hei	ghts and I	Load Capacitie	s
Column Bottom Diameter ‡	8'	10'	11'	12'	14'	15'	Concentric Load *	Eccentric Load *
8"							10,000 lb.	8,240 lb.
10"		√					14,000 lb.	11,520 lb.
12"	√	√		√			18,000 lb.	11,520 lb.
14"		√		√	√		20,000 lb.	18,120 lb.
16"	√	1					20,000 lb.	13,200 lb.
18"	√	1	√				20,000 lb.	9,040 lb.
20"	√	1	√				20,000 lb.	18,960 lb.
24"		√		√	√	√	20,000 lb.	13,200 lb.
30"	Availa	ble in D	uraGlas	page 25.	25,000 lb.	n/a		




Tapered & Non-tapered Round FRP Column

SQUARE NON-TAPERED COLUMNS

Available unfluted, fluted, recessed panel, or with a double raised panel. In addition, custom fluting is available. The astragal is molded into the shaft for consistent spacing and simplified installation.

N	on-Tapeı	red Squa	re Shaft	s Availa	ble Heig	hts and	Load Capacit	ties
Column Bottom Width	8'	9,	10'	12'	14'	16'	Concentric Load *	Eccentric Load *
6"							6,000 lb.	6,000 lb.
8"	√∙∆◊	√•∆	√∙∆◊				10,000 lb.	10,000 lb.
10"	√◊	√o	√◊	√			12,800 lb.	12,800 lb.
12"	√	1	√	√	√	√	18,000 lb.	17,320 lb.
14"	√	√	√	√	√	√	20,000 lb.	17,320 lb.
16"	Availal	ble in Du	raGlass⁺	age 24.	20,000 lb.	n/a		



Square FRP Column

13 |

All Poly-Classic® FRP Columns are available with custom fluting. $\sqrt{\text{Available unfluted.}}$

- Available with standard flutes.
- \triangle Available raised panel.
- ♦ Available with recessed panel.

Turncraft.com

[‡] Actual shaft width may be smaller than nominal size shown.

^{*} Load capacities are reduced when loads are not centered. Full documentation regarding eccentric load capacities can be found online at Turncraft.com/pdf/LoadAddendum.pdf.

Please refer to the online documentation regarding maximum eccentricity (beam offset from center) and other specifications.

FRP ROUND TAPERED COLUMN SPECIFICATIONS


			naft om *	Sh top	aft o *		available e shaft	S r	haft leck		Straight	Straight	Smooth	Top Diameter
Column nominal diameter	Shaft height (A)	Outside diameter (C)	Inside diameter (D)	Outside diameter (H)	Inside diameter (I)	For round post	For square post	Neck height † (G)	Astragal ring ‡ (F)	Flute width (24 each)	portion of shaft (unfluted)	portion of shaft (fluted)	shaft before flutes (E)	Top Diameter
6"	5' 6' 8'	5 ¹½16"	4 ¾"	4 ¹³⁄₁6"	3 ¾"	3 ¾"	2 ½"	3"	1/2"	1/2"	23 ½6" 35 ½6" 59 ½6"	n/a	n/a	Inside → Square
8"	5' 6' 8' 9' 10'	7 5/8"	6 ¾"	6 19/32"	5 ½"	5 1/8"	3 ½"	4 1/4"	1/2"	11/16"	14 ½6" 26 ½6" 50 ½6" 62 ½6" 72 ½6"	n/a 50" 54" 65"	n/a 9 ³ ⁄ ₄ " 9 ³ ⁄ ₄ " 9 ³ ⁄ ₄ "	The "Space Available Inside Shaft" measurements are
10"	4' 5' 6' 8' 9' 10' 12'	9 11/16"	8 3%"	8 %16"	7 ¾"	7 3/8"	4 ¹⁵ ⁄16"	5 1/8"	3/4"	7/8"	0 0 10 11/16" 34 11/16" 46 11/16" 58 11/16" 82 11/16"	n/a 39" 56" 65" 89"	n/a 10 ¼" 10 ½" 10 ½" 10 ½"	calculated at the top inside diameter (with ± 3/8" tolerance), when using Tuscan or Roman Doric caps. Fluted columns will have
12"	5' 6' 8' 9' 10' 12' 14' 16'	11 %"	10 ¾"	10 1/16"	9 1⁄4"	8 %"	6"	4 ¾"	3⁄4"	1"	0 8 3/4" 32 3/4" 44 3/4" 56 3/4" 80 3/4" 62" 86"	n/a 42 ³ / ₄ " 49" 53" 60" n/a 87"	n/a 11 ¼" 11 ¼" 11 ¼" 11 ¼" 11 ¾" 11 ¾" 11 ¾"	reduced tolerances.
14"	8' 9' 10' 12' 14' 16' 18' 20'	13 ½"	11 ½"	11 %6"	10 ½"	10 1/8"	6 ¾"	6 ¾"	1"	1 1/4"	33 ¼" 45 ¼" 57 ¼" 81 ¼" 57 ¼" 81 ¼" 105 ¼" 129 ¼"			
16"	5' 6' 8' 9' 10' 12' 14' 16' 18' 20'	15 1/16"	13 ½"	13 1/8"	12"	11 %"	7 ½6"	7 %"	1"	1 ½16"	16 ¼" 28 ¼" 18 ½" 30 ½" 42 ½" 66 ½" 27 ¼" 51 ¼" 99 ¼"			
18"	8' 9' 10' 12' 14' 16' 18' 20' 22' 24'	17 %"	15"	14 5⁄16"	12 ¾"	12 ¾"	8 5/16"	7 %"	1"	1 ½"	13 %" 25 %" 37 %" 61 %" 85 %" 26 %" 50 %" 98 %" 122 %"			A
20"	6' 8' 10' 12' 14' 16' 18' 20'	19 %"	18"	16 5/16"	14 1/8"	14 ½"	10"	9 ¾6"	1 %"	1 ½6"	0 22 ½" 46 ½" 70 ½" 40 ¾" 64 ¾" 88 ¾" 112 ¾"		-	
24"	8' 10' 12' 14' 16' 18' 20' 22' 24'	23 %"	22"	19 5⁄16"	18"	17 %"	12 ¾6"	12"	1 %"	2 1/8"	8" 32" 56" 24 ¹³ / ₁₆ " 48 ¹³ / ₁₆ " 72 ¹³ / ₁₆ " 96 ¹³ / ₁₆ " 120 ¹³ / ₁₆ "			B
Refer to po * Diamete † Neck He ‡ Astragal	rs may ı ight is th	vary ± 1/8 ne distanc	". e from the	e top of th	e shaft to	the top	of the ast fillet and	ragal ri cove.	ing, ± 1/8"					

| 14 | 800-423-3311


All caps, bases, and ornamental capitals are manufactured of low-maintenance materials. Materials for caps and bases will vary based on size and style. Standard Tuscan caps and bases for our 8", 10", and 12" diameter round tapered columns are our new TimeSaver ABS (recycled ABS with fiberglass reinforcement). Since these are molded products, specifications shown are $\pm 1/8$ ", and subject to change without notice.

TUSCAN CAPS AND BASES

		Τι	uscan Ba	se			Tusca	n Cap			
Column	Plinth		То	rus	Total height	Echinus	Aba	icus	Total height	Materials	
diameter	(A)	(B)	(C)	(D)	(B-D)	(E)	(F) (G)		(E-F)	available †	
6"	8"	1 ½"	1 1/4"	1/2"	3 1/4"	1"	¹ ½6"	7 ½"	2 1/16"	<u>P, D</u>	
8"	10 %"	1 1/8"	1 ¾"	5/8"	4 1/4"	¹ 5⁄ ₁₆ "	1 %"	9 %"	2 11/16"	<u>A,</u> F, D, P	
10"	13 ½"	2 %"	2 1/8"	3/4"	5 1/4"	1 13/16"	1¾"	12 1/8"	3 %6"	<u>A,</u> F, D, P	
12"	16 1/4"	2 ¾"	2 %"	7/8"	6"	1 %"	2"	14 %"	3 %"	<u>A,</u> F, D, P	
14"	18 %"	3 5/16"	3"	1"	7 1/16"	2 ½"	2 1/16"	17"	4 15/16"	<u>P, D</u>	
16"	21 5/16"	3 %"	3 %"	1 1/3"	8 5/16"	2 3/4"	2 11/16"	19 1/3"	5 1/16"	<u>P, D</u>	
18"	24"	4 3/16"	4"	1 %"	9 %16"	3"	2 15/16"	21 5/16"	5 ¹⁵ / ₁₆ "	<u>P, D</u>	
20"	27"	4 ¾"	4 1/16"	1 ¾"	10 %6"	3 1/8"	3 1/16"	24 1/4"	6 %6"	<u>P, D</u>	
24"	32 ½"	5¾"	5 1/4"	2 1/4"	13 ¼"	3 5/16"	4 1⁄8"	28 ¾"	7 1/16"	<u>P, D</u>	



[†] A-ABS TimeSaver, F-FRP, D-DuraStone™, P-Polyurethane cap with FRP base; standard material is <u>underlined</u>




ROMAN DORIC CAPS

		Rom	an Doric B	ase †		Roman Doric Cap †				
Column	Plinth		Torus		Total height	Echinus	Aba	icus	Total height	
diameter	(A)	(B)	(C)	(D)	B-D)	(E)	(F)	(G)	(E-F)	
6"	7 31/32"	1 ½"	1"	3/4"	3 1/4"	1"	1 1/4"	8"	2 1/4"	
8"	10 %"	1 ⁷ /8"	1 1/16"	¹⁵ / ₁₆ "	4 1/4"	1 1/16"	1 ½"	10 1/4"	2 15/16"	
10"	13 ½"	2 3/8"	1 3/4"	1 1/4"	5 %"	1 1/8"	1 3/4"	13"	3 %"	
12"	16 1/3"	2 3/4"	2 1/16"	1 3/8"	6 3/16"	2 1/8"	2 ¾"	15 1/3"	4 ½"	
14"	18 ¾"	3 ¾"	2 3/8"	1 %"	7 %"	2 11/16"	2 ¾"	17 ¹³ / ₁₆ "	5 %16"	
16"	21 ½"	3 %"	2 %"	2"	8¾"	3 3/16"	3 1/8"	20 5/16"	6 5/16"	
18"	24"	4 1/8"	3 5/16"	2 %"	9 13/16"	3 ½"	3 %16"	22 1/16"	7 1/16"	


† Bases are FRP, caps are polyurethane. Only the bases are available in DuraStone™-not the caps.

OPTIONAL ATTIC BASES

Column	Pli	nth		То	rus		Total height
diameter	(A)	(B)	(C)	(D)	(E)	(F)	(B-F)
6"	8"	1"	3/4"	3/4"	1/2"	1/2"	3 ½"
8"	10 %"	1 %"	1 1/8"	7/8"	3/4"	1/2"	5 1/8"
10"	13 ½"	2 ¾"	1 1/4"	1 1/8"	7/8"	5/8"	6 1/4"
12"	16 1/8"	2 ¾"	1 ½"	1 %"	1"	5/8"	7 1/4"
14"	18 ½"	3 5/16"	1 ¾"	1 5⁄8"	1 1/4"	11/16"	8 21/32"
16"	21 3/16"	3 ¾"	2 1/8"	1 1/8"	1 ½"	¹³ / ₁₆ "	10 1/8"
18"	23 15/16"	4 1/4"	2 5/16"	2 1/8"	1 ½16"	1 1/8"	11 1/4"
20"	27 1/16"	4 3/4"	2 11/16"	2 3/8"	1 3/4"	1 1/16"	13"
24"	32 ½"	5 3/4"	3 5/16"	2 13/16"	2 1/8"	1 3/4"	15 ¾"



Attic bases are FRP. Also available in DuraStone™.



BUILDERS SERIES CAPS AND BASES

		Builde	rs Series I	Base †		Builders Series Cap †					
Column	Pli	nth	То	rus	Total height	Echinus	Abacus		Total height		
diameter	(A)	(B)	(C)	(D)	(B-D)	(E)	(F)	(G)	(E-F)		
8"	10 %"	1 1/8"	1 1/4"	5/8"	3 ¾"	1 1/4"	1 1/4"	9 1/16"	2 ½"		
10"	13 ½"	2 %"	1 5⁄8"	%16"	4 1/16"	1 13/16"	1 3/4"	12 ¾16"	3 1/16"		
12"	16 1/4"	2 ¾"	2"	7/8"	5%"	1 1/8"	2"	14 %"	3 1/8"		

[†] Cap and base are polystyrene (with foam core). Not available in DuraStone™.


Turncraft.com 15 |

POLY-CLASSIC® SHAFTS FOR ROUND NON-TAPERED FRP COLUMNS


Standard FRP column shafts are the same height as the listed size. Tuscan caps and bases and Attic bases go around the shaft, and do not affect the overall height. Ornamental capitals are not typically available for non-tapered round shafts.

		Shaft dia	meters *	Space a	vailable shaft			
Column	Shaft height	Outside diameter	Inside diameter	For round	For square	Flute width (24	Concentric	Eccentric
diameter	(A)	(B)	(C)	post	post	each)	Load	Load
8"	8' 10'	7 %"	6 ¾"	6 %"	4 ½"	11/16"	10,000 lb.	6,600 lb.
10"	8' 10'	9 11/16"	8 3/8"	8"	5 %"	7/8"	14,000 lb.	10,720 lb.
12"	8' 10'	11 %"	10 ¾"	10 %"	7 5/16"	1"	18,000 lb.	13,200 lb.
	12'							
14"	8' 10' 12'	13 ½"	11 ½"	11 ½"	7 %"	1 5⁄16"	20,000 lb.	11,520 lb.
	14'							
16"	8' 10'	15 1/16"	13 ½"	13"	9 3/16"	1 ½"	20,000 lb.	13,200 lb.
18"	8' 10' 11'	17 %"	15"	14 ½"	10 1/4"	1 ¹ ½16"	20,000 lb.	9,040 lb.
20"	8' 10' 11'	19 ¾"	18"	16 ½"	11 5/8"	1 1/8"	20,000 lb.	18,960 lb.
24"	8' 10' 12' 14' 15'	23 3/8"	21 1/4" (top ID)	19 ½"	13 ¾"	2 5/16"	20,000 lb.	13,200 lb.

^{*} Diameters may vary \pm 1/8".




The "Space Available Inside Shaft" measurements are calculated at the top inside diameter (with ± 3/8" tolerance) when using Tuscan or Roman Doric caps. Fluted columns may have reduced tolerances.

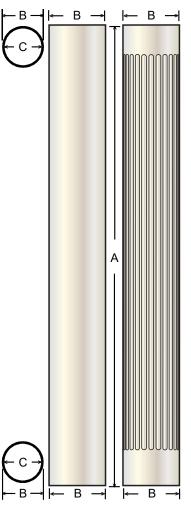

TUSCAN CAPS AND BASES

			Tus	can Ba	ase		Tuscan Cap				
Column	Pli	nth	Total Torus height		Materials	Echinus	Aba	acus	Total height	Materials	
diameter	(A)	(B)	(C)	(D)	(B-D)	available *	(E)	(F) (G)		(E-F)	available *
8"	10 %"	1 1/8"	1 3/4"	5/8"	4 1/4"	<u>A</u> , F	1 13/16"	1 ¾"	12 1/8"	3 %16"	<u>P, D</u>
10"	13 ½"	2 ¾"	2 1/8"	3∕4"	5 1/4"	<u>A</u> , F	1 1/8"	2"	14 %"	3 %"	<u>P, D</u>
12"	16 1/4"	2 ¾"	2 ¾"	7∕8"	6"	<u>A</u> , F	2 ½"	2 5/16"	17"	4 13/16"	<u>P, D</u>
14"	18 %"	3 5/16"	3"	1"	7 5/16"	<u>E</u>	2 ¾"	2 11/16"	19 1/8"	5 1/16"	<u>P, D</u>
16"	21 5/16"	3 1/8"	3 %"	1 1/8"	8 5/16"	E	3"	2 15/16"	21 5/16"	5 ¹⁵ / ₁₆ "	<u>P, D</u>
18"	24"	4 3/16"	4"	1 ¾"	9 %16"	<u>E</u>	3 1/8"	3 1/16"	24 1/4"	6 %16"	<u>P, D</u>
20"	27"	4 ¾"	4 1/16"	1 ¾"	10 1/16"	<u>F</u>	3 ¾16"	4 1/8"	28 ¾"	7 5/16"	<u>P, D</u>
24"	32 ½"	5 ¾"	5 1/4"	2 1/4"	13 1/4"	<u>F</u>	3 5/16"	4 1/8"	32 ½"	7 1/16"	<u>P, D</u>


^{*} A-ABS, F-FRP, D-DuraStone $^{\text{TM}}$, P-Polyurethane; standard material is <u>underlined.</u>



OPTIONAL ATTIC BASES

				Attic Bas	е		
Column	Pli	nth		То	rus		Total height
diameter	(A)	(B)	(C)	(D)	(E)	(F)	(B-F)
8"	10 %"	1 %"	1 1/8"	7/8"	3/4"	1/2"	5 1/8"
10"	13 ½"	2 %"	1 1/4"	1 1/8"	7/8"	5/8"	6 1/4"
12"	16 1/3"	2 ¾"	1 ½"	1 %"	1"	5/8"	7 1⁄4"
14"	18 ½"	3 5/16"	1 3/4"	1 %"	1 1/4"	11/16"	8 5/8"
16"	21 ¾16"	3 ¾"	2 1/8"	1 1/8"	1 ½"	¹³ / ₁₆ "	10 1/8"
18"	23 15/16"	4 1/4"	2 5/16"	2 1/8"	1 ½16"	1 1/8"	11 1/4"
20"	27 1/16"	4 ¾"	2 11/16"	2 %"	1 ¾"	1 ½16"	13"
24"	32 ½"	5 ¾"	3 5/16"	2 13/16"	2 1/8"	1 3/4"	15 ¾"

Attic bases are FRP. Also available in DuraStone™.



800-423-3311


POLY-CLASSIC® SQUARE SHAFTS FOR NON-TAPERED FRP COLUMNS

Column nominal width	Shaft height	Outside width (B)	Inside width * (C)	Neck height † (E)	Astragal ring ‡ (D)	width	Space available inside shaft *	Concentric Load	Eccentric Load
6"	8' 10'	5 %"	4 3/4"	3 5/8"	3/4"	1/2"	4 ½"	6,000 lb.	6,000 lb.
8"	8' 9' 10'	7 1/8"	5 ¾"	4 1/2"	3/4"	11/16"	5 ½"	10,000 lb.	10,000 lb.
10"	8' 9' 10' 12'	9 %"	8 ¾"	5 1/16"	3/4"	7/8"	8 ½"	12,800 lb.	12,800 lb.
12"	8' 9' 10' 12' 14' 16,	11 %"	10 ¾"	4 ½"	3/4"	1"	10 ½"	18,000 lb.	17,320 lb.
14"	8' 9' 10' 12' 14' 16,	13 %"	12 ¾"	7"	1"	1 ¼"	12 ½"	20,000 lb.	17,320 lb.
	Flutad	column	(stack)			Daisad na	nol columns		

	Fluted	column (stock)		Raised	l panel columr	ıs
Column		Bottom of shaft before flutes	Flute length	Bottom of shaft before panel	Bottom panel height	Top panel height
width	height	(F)	(G)	(H)	(l)	(J)
	8'	10 ¹5⁄₁6"	77 ¹³ / ₁₆ "	9 %"	22 ¹5⁄16"	45 %"
8"	9'	10 15/16"	89 13/16"		26 ¹⁵ / ₁₆ "	53 %"
	10'	22 15/16"	89 13/16"	21 %"	26 ¹⁵ / ₁₆ "	53 %"

	Re	cessed p	anel col	umns	
Column	Shaft	Base to panel *	Panel height	Panel to top height	Panel width
width	height	(K)	(L)	(M)	(N)
	8'	11 ¾"	76 ¾"	7 %"	4 %"
8"	9'	11 ¾"	88 ¾"	7 %"	4 1/8"
	10'	11 ¾"	100 ¾"	7 %"	4 %"
	8'	14 ½"	73 11/16"	8 3/16"	6 %"
10"	9'	14 ½"	85 ¹ / ₁₆ "	8 3/16"	6 %"
	10'	14 ½"	97 11/16"	8 3/16"	6 %"


- * For 8" size, stock fluted shaft value is shown. Paneled and plain shafts are typically 1/2" to 1" greater.
- † Neck Height is the distance from the top of the shaft to the top of the astragal ring (±1/8").
- ‡ Astragal ring is only the ring portion, and does not include the fillet and cove

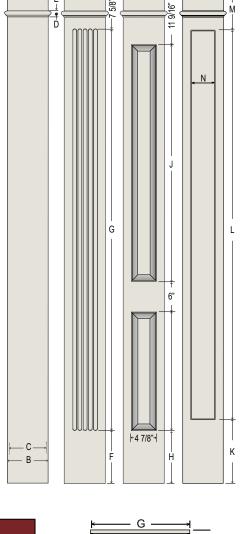


TUSCAN CAPS AND BASES

		1	Гuscan В	ase *		Tuscan Cap *					
Column	Plii	nth	То	rus	Total height	Echinus	Aba	icus	Total height		
width	(A)	(B)	(C)	(D)	(B-D)	(E)	(F)	(G)	(E-F)		
6"	8"	1 ½"	1 1/4"	1/2"	3 1⁄4"	1"	1 ½16"	8 1/16"	2 1/16"		
8"	11 ¾"	1 %"	1 ¾"	5/8"	4 1/4"	1 5⁄16"	1 ½16"	11 1/4"	2 ¾"		
10"	13 ½"	2 %"	2 1/8"	3/4"	5 1/4"	1 13/16"	1 ¾"	13 ¼"	3 %16"		
12"	17"	2 ¾"	2 %"	7/8"	6"	1 1/8"	2"	17 1/4"	3 1/8"		
14"	18 ¹³ / ₁₆ "	3 ¾"	2 15/16"	1 ½16"	7 %"	2 ½"	2 5/16" 18 11/16"		4 ¹³ / ₁₆ "		

^{* 14&}quot; bases are FRP, other cap and base are polyurethane. Also available in DuraStone™.





_	<u>, ⊱G →</u> .	
Î		F
		下
l B I		 D
		c L

Column	Pli	nth		То	rus		Total height		
width	(A)	(B)	(C)	(D)	(E)	(F)	(B-F)		
6"	8"	1"	3/4"	3/4"	1/2"	1/2"	3 ½"		
8"	10 %"	1 1/8"	1 1/8"	7/8"	3/4"	1/2"	5 1/8"		
10"	13 ½"	2 %"	1 1/4"	1 1/8"	7/8"	5/8"	6 1/4"		
12"	17"	2 3/4"	1 ½"	1 %"	1"	5/8"	7 1/4"		
14"	18 ½"	3 5/16"	1 ¾"	1 %"	1 1/4"	¹ / ₁₆ "	8 %"		

Attic bases are FRP. Also available in DuraStone™.

E D C B B

PEDESTAL BASE FOR SQUARE FRP COLUMNS

Column	Bottom width	Total height	Bottom	Center	Platform	Тор	Top width
width	(A)	(B)	(C)	(D)	(E)	(F)	(G)
8"	15"	42 %"	8 11/16"	25 %"	2 1/8"	5 11/16"	8 1⁄4"

^{*} Pedestal bases are FRP. Also available in DuraStone™. Use with Tuscan cap (above) or Ornamental Capitals.

CAPITALS FOR FRP ROUND TAPERED COLUMNS

Our standard round capitals install on top of the column and are set on the fillet or the neckring. Capitals are either load-bearing or will include a load-bearing plug.



Shaft		Em	pire		E	mpire wit	h Neck	ing	G	reek Ang	gular lor	nic	Greek Erectheum				
nominal bottom diameter	Capital height	Abacus width	Scroll width	Height adjust *	Capital height	Abacus width	Scroll width	Height adjust *	Capital height	Abacus width		Height adjust *	Capital height	Abacus width	Scroll width	Height adjust *	
6"	3 1/8"	9"	8 ¾"	-1"	6 %"	9"	8 ¾"	+3 1/4"	3 5/8"	9 1/4"	9"	-1/2"	3 1/4"	6 ¾"	8 ½"	-7/8"	
8"	3 ¾"	10"	9"	-1"	7 3/4"	10"	9"	+3 ½"	3 ¾"	9 ½"	9"	-1"	3 ¾"	7 3/4"	11 ¾"	-1"	
10"	5 ½"	16"	13 ½"	-3/8"	10"	13 ½"	12 1/4"	+4 %"	5 %"	14 1/4"	13 1/4"	-1/2"	5 ½"	12"	17 ½"	-3/8"	
12"	6 1/4"	18"	17"	+3/4"	11"	18"	17"	+6 1/4"	6"	17 1/4"	17"	+1/2"	6 1/4"	14 ½"	21"	+3/4"	
14"	7 1/4"	20 1/4"	19 ½"	-3/4"	14 ½"	20 ½"	19 ½"	+7 ½"	7 1/4"	20 ¾"	19 1/4"	-3/4"	7"	15"	21"	-1"	
16"	8 ¾"	23"	19 ½"	+5/8"	17"	23"	19 ½"	+9 %"	8 3/8"	20 ½"	19 ½"	+1/4"	9"	17 ½"	26"	+7/8"	
18"	10"	30 ¾"	26 1/4"	+3/4"	15"	32"	26 1/4"	+6 ¾"	9 ¾"	24 1/4"	19 ¾"	+1/2"	10 ½"	22"	29"	+1 1/4"	
20"	11 1/4"	34"	28"	+1 1/8"	17 1⁄4"	34"	28"	+8 ½"	11"	29 ¾"	28"	+7/8"	11"	26"	36"	+7/8"	
24"	12 ¾"	35 ½"	35"	-1 1/8"	19"	35 ½"	35"	+6 ¾"	12 ¾"	35"	34 ½"	-1 1/8"	13"	30 ½"	43"	-7/8"	
30"		n.	/a			n/	'a			n/	a		15"	31"	45 ½"	TBD	

Shaft	Greek	Erectheu	ım with N	ecking	Modern Composite			Rom	nan Corin	thian	Roman Doric Ornamental				
nominal bottom diameter	Capital Height	Abacus width	Scroll width	Height adjust *	Capital height	Abacus width	Height adjust *	Capital height	Abacus width	Height adjust *	Capital height	Abacus width	Scroll width	Height adjust *	
6"	5 ¾"	7 ¾"	11 ¾"	+2 1/8"	7"	8"	+3 %"	7"	9 ½"	+3 %"	4"	8 ¾"	n/a	+1/8"	
8"	7 ½"	10 ½"	15"	+3 1/4"	8 ½"	10 ¾"	+4 1/4"	10 1/4"	12 ¾"	+6"	6"	13 1/8"	n/a	+1 1/4"	
10"	8 ½"	12"	17 1/4"	+3 ¾"	12 1/4"	16 ½"	+7 1/8"	13 %"	17 ¾"	+8 ¾"	7"	16 1/4"	n/a	+1 1/8"	
12"	9 ½"	14 ½"	21"	+4 3/4"	14 ½"	19"	+9 ¾"	15 ½"	18 ½"	+10 3/4"	7"	16 1/4"	n/a	+1 ½"	
14"	11 1/4"	15"	21"	+4 1/4"	17"	20"	+10"	17"	22"	+10"	9"	21"	n/a	+1 1/4"	
16"	13 ½"	17 ½"	26"	+6 ¾"		n/a		20"	27"	+12 %"	10 ½"	24"	n/a	+2 1/8"	
18"	15"	22 ½"	29"	+6 ¾"	22 ½"	25"	+14 1/4"	23"	32 ½"	+14 ¾"	12 ½"	28"	n/a	+3 %"	
20"	17"	26"	36"	+8 1/4"	22 ½"	25"	+13 ¾"	24 3/4"	38 ½"	+16"	12 ½"	28"	24"	+2 3/8"	
24"	19"	30 ½"	43"	+6 ¾"		n/a		27 ³ / ₄ "	42"	+15 ½"		n	/a		
30"	24 ¾"	31"	45 ½"	TBD		n/a		37 ½"	46 ½"	n/a		n	/a		

Shaft		Romai	n Ionic			Scan	nozzi		Ten	ple of W	inds
nominal bottom diameter	Capital height	Abacus width	Scroll width	Height adjust *	Capital height	Abacus width	Scroll width	Height adjust *	Capital height	Abacus width	Height adjust *
6"	2 1/4"	6 1/8"	8 1/16"	-1 1/8"	2 1/8"	7 ¾"	6 1⁄4"	-1 1/2"	7"	8"	+3 %"
8"	3"	8 1/4"	10 ½"	-1 ¾"	3"	10 1/4"	9"	-1 ¾"	8"	12"	+3 ¾"
10"	3 %"	11"	13 %"	-2 1/4"	3 1/8"	14 ½"	12 ½"	-2"	11 1/8"	15 1/4"	+6"
12"	4 ½"	12 ½"	16 ½"	-1"	4 1/8"	16 ¾"	14"	-5/8"	13 ¾"	17"	+9"
14"	5 ½"	17 ½"	23"	-2 1/2"	5 ½"	19"	16 ¾"	-2 1/2"	14"	21 1/4"	+7"
16"	6 1/8"	17 ½"	22"	-2"	6 1⁄4"	22 1/4"	18 ½"	-1 1/8"	16"	23"	+8 1/8"
18"	6 ½"	20"	24 1/4"	-2 ¾"	7"	23 ½"	23"	-2 1/4"	18 1/8"	26 ¾"	+9 1/8"
20"	8 ¾"	25"	31 ¾"	-1 3/8"	8 ¾"	26"	21 ½"	-1 3/8"	21 %"	28 ¾"	+12 %"
24"	9"	25 1/4"	33"	-4 %"	10 1/4"	34 1/4"	29 ½"	-3 %"	26"	30 %"	+13 ¾"
30"	12 ½"	32"	40 ½"	TBD	12 ¾"	39"	33"	TBD	30"	39"	n/a

For Empire with Necking, Greek Erectheum with Necking, Modern Composite, Roman Corinthian, and Temple of Winds capitals, trim at this point:

For all other capital styles, trim at this point:

| 18 | 800-423-3311

^{* &}quot;Height adjust" column is the adjustment to overall height when using this capital on a column trimmed for architecturally correct installation. Highlighted sizes are not load bearing and will require a plug. Height shown does not include plug.

ORNAMENTAL CAPS FOR SQUARE NON-TAPERED FRP COLUMNS

Square Capitals install on top of the column and are set on the fillet or the neckring. All of these capitals are structural and will meet the columns' stated load capacities when properly installed. Square Ornamental Capitals are not available in DuraStone™.




Shaft nominal		Empire Empire with Necking						king	Greek Angular Ionic				G	reek E	recthe	um	Greek Erectheum with Necking			
bottom diameter	Capital height	Abacus width	Scroll width	Height adjust	Capital height	Abacus width	Scroll width	Height adjust					Capital height	Abacus width	Scroll width	Height adjust	Capital height	Abacus width	Scroll width	Height adjust
6"		n	/a		7 ¾"	10"	9"	+4 1/8"		n	/a		3 ¾"	7 ¾"	11 ¾"	-1/8"	5 ¾"	7 ¾"	11 ¾"	+2 1/8"
8"	5 1/4"	13 ½"	12 1/4"	+1/8"	10"	13 ½"	12 1/4"	+5 ½"	5 1/8"	14 1/4"	13 ¾"	0"	5 1/4"	10 ½"	15"	+1/8"	7 ½"	10 ½"	15"	+3"
10"	6 1/4"	18"	17"	+3⁄8"	11"	18"	17"	+5 15/16"	6"	17 1/4"	17"	+1/8"	6 1/4"	14 ½"	21"	+3/8"	9 ½"	14 ½"	21"	+4 1/16"
12"	7 1/4"	20 1/4"	19 ½"	+1"	14 1/4"	20 ½"	19 ½"	+9 ¾"	7 1/4"	20 ¾"	19 1/4"	+1"	7"	15"	21"	+2 1/2"	11 1/4"	15"	21"	+6 ¾"
14"	8 ¾"	23"	19 ½"	+11/16"	17"	23"	19 ½"	+10"	8 3/8"	20 ½"	19 ½"	+5/16"	9"	17 ½"	26"	+ ¹⁵ / ₁₆ "	13 ½"	17 ½"	26"	+6 ½"

Shaft ominal	_	Moder ompos		Roman Corinthian		Roman Doric Ornamental		Roman Ionic			Scamozzi			Temple of Winds						
ottom ameter		Abacus width	Height adjust	Capital height	Abacus width	Height adjust	Capital height		Height adjust	Capital height	Abacus width		Height adjust	Capital height	Abacus width	Scroll width	Height adjust	Capital height	Abacus width	Height adjust
6"	8 1/2"	10 ¾"	+4 1/8"	8 ½"	12"	+4 1/8"	4 1/2"	10 ½"	+5/8"	3"	8 1/4"	10 ½"	- ½"	3"	10 1/4"	9"	-7/8"	7 ½"	10 ½"	+3 %"
8"	11 1/2"	16 ½"	+7"	11 ½"	15"	+7"	6"	14 1/4"	+7/8"	3 1/8"	10 ½"	13 ½"	-1 1/2"	3 1/8"	14 ½"	12 ½"	-1 1/4"	10"	13 %"	+5 ½"
10"	14 ½"	19"	+9 1/16"	14 ½"	18 ½"	+9 1/16"		n/a		4 ½"	12 ½"	16 ½"	-1 ¾"	4 1/8"	16 ¾"	14"	-1"	11 %"	16 %"	+6 %16"
12"	17"	20"	+12 ½"	17"	22"	+12 ½"	9"	21"	+2 ¾"	5 ½"	17 ½"	23"	-3/4"	5 ½"	19"	19 ¾"	-3/4"	14"	21 1/4"	+9 1/2"
14"	22 ½"	25"	+15 ½"	20"	27"	+13"	10 ½" 24" +2 ¾6" n/a			a		6 1/4"	22 1⁄4"	18 ½"	-1 ¹³ / ₁₆ "	16"	23"	+9"		

Height Adjust is based on trimming the shaft at the architecturally correct location.

Turncraft.com 19 |

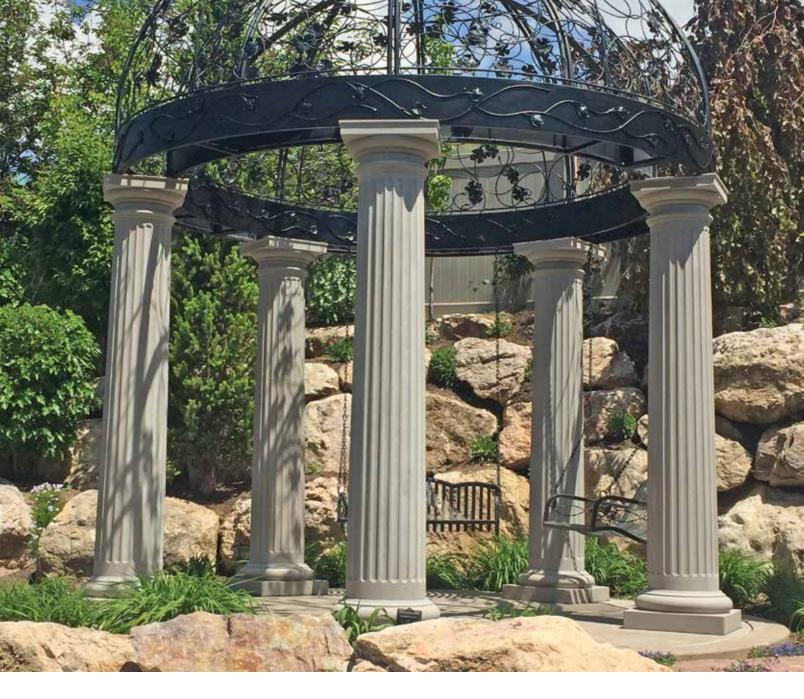

POLY-CLASSIC®

DST DuraStoneTM Columns

TEXTURED PAINTABLE COLUMN

- PAINT ANY COLOR
- WEATHER RESISTANT
- READY TO INSTALL

- SAME LOAD CAPACITIES AS FRP COLUMNS
- **LIMITED LIFETIME WARRANTY**
- **LOW MAINTENANCE**

20 800-423-3311



FLAME GUARD PROTECTED

Poly-Classic® DuraStone™ Textured Paintable Columns are to achieve the distinction of passing an industry test (ASTME, 84-01) that measures the flame spread and smoke development of building components in a fire.




POLY-CLASSIC® DURASTONE™ COLUMNS

Get the strength and durability of our popular Poly-Classic® FRP columns in a textured finish. Durastone™ columns are available in all the same sizes as our paint grade FRP columns with Tuscan caps and bases. (Roman Doric caps are not available). For specifications and other information please refer to the Poly-Classic® FRP column specifications on pages 13-19.

READY TO INSTALL


Simply cut to length and install. Poly-Classic® DuraStone™ Columns have the same load-bearing capacity as our standard Poly-Classic® FRP Columns. We also have a limited selection of decorative capitals to match the columns. The bases on the larger columns (18″and over) will come in two pieces; when installed the assembly seam will be visible.

	Tapered Round DuraStone™ Shafts Available Heights and Load Capacities													
Column Bottom Diameter ‡	5'	6'	8'	9'	10'	12'	14'	16'	18'	20'	22'	24'	Concentric Load *	Eccentric Load *
6"													6,000 lb.	6,000 lb.
8"		1	å	å	å								10,000 lb.	6,600 lb.
10"		1	å	å	å	å							14,000 lb.	10,720 lb.
12"	√	V	å	å	å	å	√	å					18,000 lb.	13,200 lb.
14"			1	1	1	1	V	1	1	1			20,000 lb.	11,520 lb.
16"		1	1	1	1	1		1	1	1			20,000 lb.	13,200 lb.
18"			V	V				V	V	V			20,000 lb.	9,040 lb.
20"		V	V		1	1	√	V	V	V			20,000 lb.	18,960 lb.
24"			1					1	V	V			20,000 lb.	13,200 lb.



Tapered & Non-tapered Round FRP Column

Non-Tapered Round DuraStone™ Shafts Available Heights and Load Capacities													
Column Bottom Diameter ‡	8'	10'	11'	12'	14'	15'	Concentric Load *	Eccentric Load *					
8"	V	V					10,000 lb.	8,240 lb.					
10"	V	V					14,000 lb.	11,520 lb.					
12"	1	1		√			18,000 lb.	11,520 lb.					
14"	1	1		√	V		20,000 lb.	18,120 lb.					
16"	1	1					20,000 lb.	13,200 lb.					
18"	√	√	V				20,000 lb.	9,040 lb.					
20"	1	1	V				20,000 lb.	18,960 lb.					
24"	1	1		1	V	1	20,000 lb.	13,200 lb.					



Square FRP Column

21 |

Non-Tape	Non-Tapered Square DuraStone™ Shafts Available Heights and Load Capacities												
Column Bottom Width	8'	9'	10'	12'	14'	16'	Concentric Load *	Eccentric Load *					
6"							6,000 lb.	6,000 lb.					
8"	√∙∆◊	√•∆	√∙∆◊				10,000 lb.	10,000 lb.					
10"	√◊	√◊	√◊	√			12,800 lb.	12,800 lb.					
12"	1	√	√	√	√	√	18,000 lb.	17,320 lb.					
14"	√	√	√	√	√		20,000 lb.	17,320 lb.					
+ Actual a	Actual shaft width may be smaller than nominal size shown												

All Poly-Classic® DuraStone™ Columns are available with custom fluting.

- $\sqrt{}$ Available unfluted.
- Available with standard flutes.
- \triangle Available raised panel.
- ♦ Available with recessed panel.

Please refer to the online documentation regarding maximum eccentricity (beam offset from center) and other specifications.

Turncraft.com

[‡] Actual shaft width may be smaller than nominal size shown.

^{*} Load capacities are reduced when loads are not centered. Full documentation regarding eccentric load capacities can be found online at Turncraft.com/pdf/EccentricLoad.pdf and Turncraft.com/pdf/LoadAddendum.pdf.



POLY-CLASSIC® DGL Dura GlassTM Columns

- **EASY TO CUT AND INSTALL**
- **DECAY RESISTANT**
- LOW MAINTENANCE
- LIGHTWEIGHT COLUMNS

- **NOW AVAILABLE IN 30" ROUND**
- **IMPACT RESISTANT**
- LIMITED LIFETIME WARRANTY
- READY TO PRIME AND PAINT


| 22 800-423-3311


LIGHTWEIGHT FIBERGLASS COLUMNS EASILY HANDLE THE LOAD

Sometimes the most beautiful solutions are the most simple. Poly-Classic® DuraGlass™ square columns from Turncraft offer the classic beauty that homeowners and commercial property owners appreciate. Made from lightweight fiberglass, these columns are easy to cut, easy to install, and strong enough to carry heavy loads. Like other Poly-Classic® columns, DuraGlass™ columns are decay resistant and require little maintenance.

PLAN TYPES

Poly-Classic® Duraglass™ Columns are available in the following plan types. Please specify when you order. (Fractional components shown are typical. Customer may specify actual returns, wall thicknesses, etc.)

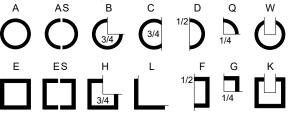


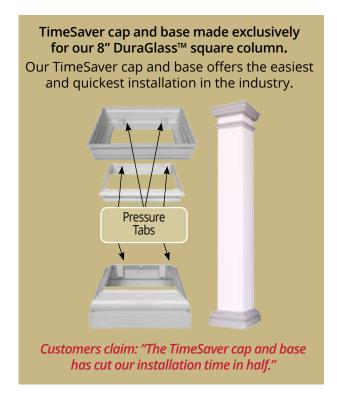




DURAGLASS™ NON-TAPERED SQUARE COLUMNS

		Shaft bottom †		Shaf	ft top	Space a		
Column nominal	Shaft height	Outside width	Inside width	Shaft neck ‡	Astragal ring	For round	For square	Load
width †	(A)	(B)	(C)	(E)	(D)	support	support	capacity
8"	6' 8' 9' 10' 12'	7 %"	7 1⁄8"	4 ½"	3/4"	6 ¾"	6 ¾"	5,000lb.
10"	6' 8' 9' 10' 12'	9 5%"	9 1⁄8"	5"	3/4"	8 ¾"	8 ¾"	6,000lb.
12"	6' 8' 9' 10' 12'	11 %"	11 ½"	5 ½"	3/4"	10 ¾"	10 ¾"	7,000lb.
16"	8' 10' 12' 14' 16' 18' 20'	15 %"	15 1⁄8"	7 %"	1"	14 ¾"	14 ¾"	20,000lb.




[†] Actual shaft net widths may vary from nominal size shown. ‡ Necking is shipped loose for pultruded columns. Spacing shown is typical, but may be adjusted by the installer. (Necking on 16" columns is integrated with the shaft.)



Column	Plinth		Torus		Total height	Echinus	Abacus		Total height	
width	(A)	(B)	(C)	(D)	(B-D)	(E)	(F)	(G)	(E-F)	Material
8"	10 %16"	1 ¾"	1 5⁄8"	1/2"	3 %"	1 5⁄16"	1 ¾"	10 11/16"	2 11/16"	ABS
10"	12 19/16"	1 ¾"	1 %"	1/2"	3 1/8"	1 5⁄16"	1 ¾"	12 11/16"	2 11/16"	Pultruded FG
12"	17"	2 ¾"	2 %"	7/8"	6"	1 1/8"	2"	17 1/4"	3 %"	Polyurethane
16"	22 1/4"	3 %"	3 3/8"	1 1/8"	8 %"	2 13/16"	2 3/4"	22 ½"	5 %16"	Fiberglass

Tuscan Cap and Base


DURAGLASS™ TAPERED BUNGALOW COLUMNS



Shaft		Shaft Speci	fications	
nominal bottom	Shaft bottom width NET	Shaft bottom inside width	Shaft top width NET	Shaft top inside width
width *	(A)	(B)	(C)	(D)
10"	9 5/8"	9"	5 5/8"	5"
12"	11 5/8"	11"	7 5/8"	7"
16"	15 5/8"	15	11 5/8"	11"

^{*} Actual width is 3/8 less than nominal

Shaft		PVC	Base		PVC Cap					
nominal	Plinth width	Plinth height	Profile height	Total height	Abacus width	Abacus height	Profile height	Total height		
width	А	В	С	В-С	D	Е	F	E-F		
10"	13 5/8"	1"	1 1/4"	2 1/4"	9 5/8"	1"	1 1/8"	2 1/8"		
12"	15 5/8"	1"	1 1/4"	2 1/4"	11 5/8"	1"	1 1/8"	2 1/8"		
16"	19 5/8"	1"	1 1/4"	2 1/4"	15 5/8"	1"	1 1/8"	2 1/8"		



Ε

	E F
	С
	В
⊢ A —	
Tuscan Cap and Bas	е


Shaft		Tuscar	n Base		Tuscan Cap					
nominal bottom	Plinth width	Plinth height	Profile height	Total height	Abacus width	Abacus height	Profile height	Total height		
width	А	В	С	В-С	D	Е	F	E-F		
10"	13 1/8"	1 11/16"	2"	3 11/16""	8 1/2"	1 7/16"	1 3/8"	2 13/16"		
12"	15 1/8"	1 11/16""	2"	3 11/16""	10 1/2"	1 7/16"	1 3/8"	2 13/16"		
16"	19 1/8"	1 11/16""	2"	3 11/16""	14 1/2"	1 7/16"	1 3/8"	2 13/16"		

DURAGLASS™ ROUND TAPERED COLUMNS

Standard DuraGlass™ column shafts are the same height as the listed size. Tuscan cap and base and Attic base go around the shaft, and do not affect the overall height. Ornamental capitals are set on top of the column astragal, and will affect the overall height: see the Poly-Classic® Ornamental Capitals specifications (page 18) for available capital sizes and more information.


		Shaft	neck	Shaft b	oottom *	Shaft	top *		available e shaft	
Column nominal	Shaft height	Neck height	Astragal ring	Outside diameter	Inside diameter	Outside diameter	Inside diameter	For round	For square	Load
diameter *	(A)	(B)	(C)	(D)	(E)	(F)	(G)	support	support	capacity
	8'									
	10'									
	12'									
	14'									
	16'									
30"	18'	13 %"	2 ½"	30"	29"	24 ½"	23 ½"	23"	16 ¼"	25,000 lb.
30	20'	15 /8	2 /2	30	23	2 7 7 2	25 /2	25	10 /4	25,000 lb.
	22'									
	24'									
	26'									
	28'									
	30'									

^{*} Actual shaft net diameters may be smaller than nominal size shown.



		Tus	scan B	ase			Tuscar	า Cap		
Column	Plinth		Torus		Total height	Echinus	Abacus		Total height	
diameter	(A)	(B)	(C)	(D)	(B-D)	(E)	(F)	(G)	(E-F)	Material
30"	40 ½"	7 1/4"	6 ½"	2 ¾"	16 ½"	4 ½16"	5 1⁄8"	35 ¾"	9 %16"	Fiberglass

			Opt	ional Atti	c Base			
Column	Pli	nth		Tor	us	Total height		
diameter	(A)	(B)	(C)	(D)	(E)	(F)	(B-F)	Material
30"	40 ½"	7 1⁄4"	3 %"	3 1/8"	2 %"	1 %"	19 ¼"	Fiberglass



Attic Base

DURAGLASS™ ROUND NON-TAPERED COLUMNS


Standard DuraGlass™ column shafts are the same height as the listed size. Tuscan caps and bases and Attic bases go around the shaft, and do not affect the overall height. Tuscan bases are used (upside-down) as caps. Ornamental capitals are not available for non-tapered shafts.

		Shaft bottom *		Shaft top *			vailable shaft	
Column nominal	Shaft height	Outside diameter	Inside diameter	Outside diameter	Inside diameter	For round	For square	Load
diameter *	(A)	(B)	(C)	(B)	(C)	support	support	capacity
	8'							
	10'							
30"	12'	30"	29"	30"	29"	28 ½"	20 1/8"	25,000 lb.
	14'							
	15'							

^{*} Actual shaft net diameters may be smaller than nominal size shown.



		Tus	can Ba	ise			Τι	ıscan	Сар		
Column	Pli	nth	То	rus	Total height	Echi	nus	Aba	acus	Total height	
diameter	(A)	(B)	(C)	(D)	(B-D)	(D)	(C)	(B)	(A)	(B-D)	Material
30"	40 ½"	7 1/4"	6 ½"	2 ¾"	16 ½"	2 ¾"	6 ½"	7 1/4"	40 ½"	16 ½"	Fiberglass






POLY-CLASSIC®

PCP Porch Posts

- READY TO INSTALL
- LOW MAINTENANCE
- PROTECTIVE UV INHIBITOR
- RAIL ATTACHMENT INSERT


- SQUARE STEEL CORE
- SEAMLESS WINDOW GRADE VINYL
- READY TO PRIME AND PAINT
- **LIMITED LIFETIME WARRANTY**

26 800-423-3311

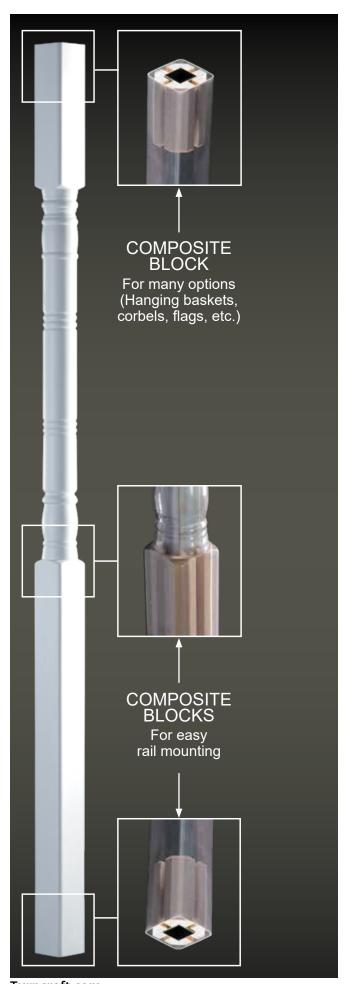


POLY-CLASSIC® PORCH POSTS

Excellent design, performance, and low maintenance are built into every Turncraft Poly-Classic® porch post. For easy rail attachment and substantial load-bearing strength, each Poly-Classic® porch post has a galvanized steel square core and sturdy inserts at critical connection points. Constructed from seamless window grade vinyl with UV inhibitor, Poly-Classic® porch posts are delivered with a matte white finish but can be painted to match your project. They will deliver eye-catching beauty for many years to come without the maintenance of traditional products. Installation hardware is included with the post.

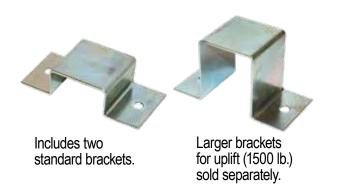

POLY POSTS

Nominal width	Actual width	height	Base height	weight	Load bearing capacity
5"	4 1/8"	96"	42 1/8"	23	3,000 lb.
5"	4 1/8"	108"	42 1/8"	27	2,500 lb.

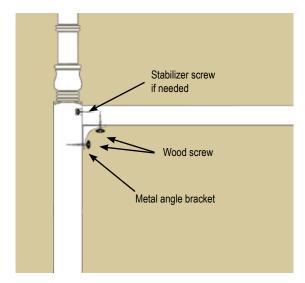

Turncraft.com 27 |



POLY-CLASSIC®

CRE Craftsman Series

- MADE FROM EXPANDED CELLULAR PVC
- E-Z LOCK JOINT DESIGN
- ASSEMBLES AROUND A STRUCTURAL SUPPORT
- MIX-N-MATCH

- LOW MAINTENANCE
- LIMITED LIFETIME WARRANTY
- READY TO PRIME AND PAINT
- CUSTOM SIZES AVAILABLE

28 800-423-3311

THE STYLE IS TIMELESS. NOW THE COLUMN IS, TOO.

Born out of the understated, practical tradition of the early 1900s Arts and Crafts movement, the square tapered column has become popular in modern adaptations of the the Craftsman, Prairie, Bungalow, Country and Mission style homes of today. Now this timeless style is available in expanded cellular PVC for quick, easy assembly and virtually maintenance-free performance!

PRECISION MITER JOINTS

Vertical edges of Craftsman shafts (tapered, non-tapered, pedestal and newel post styles) all incorporate the E-Z Lock miter joint for consistently straight miters.



PLAN TYPES

Craftsman Series are available in the following plan types. Please specify when you order. (Customer may specify actual returns, wall thicknesses, etc.) Plan O & N are available only as non-tapered.



PANEL STYLES







Plain

Fluted

Raised Panel





"Square Corner" Recessed Panel

"Square Corner" Raised Panel

CRAFTSMAN PEDESTALS AND NEWELS






Craftsman Standard Tapered Square

Craftsman Standard Tapered Square with Raised Panels Craftsman Standard Tapered Square with Recessed Panels Craftsman Non-Tapered Square Smooth Craftsman Non-Tapered Square Fluted Craftsman Non-Tapered Square Raised Panels Craftsman Non-Tapered Square Recessed Panels

POLY-CLASSIC® CRAFTSMAN TAPERED SQUARE


Craftsman columns are available plain, or with three different paneled options: raised panel, "square corner" raised panel, and recessed panel. (Since all tooling used for routing the panels is done with round bits, there will always be some radius in the cor-ners. The "square corner" style uses the smallest bit possible to minimize that radius - about 1/8".)

			Shaft din	nensions		Panel dimensions †				
		Bott	om	То	р	From	From	From	Width of	
Nominal	Available heights	Outside width	Inside width	Outside width	Inside width	bottom of shaft ‡	top of shaft	side of shaft	routed channel	
width	(A)	(B)	(C)	(E)	(D)	(F)	(G)	(I)	(H)	
	4'									
	5' 6' 8'									
10"	6'	9 %"	8 ¾"	5 %"	4 %"	10 ½"	2 ½"	1 1/4"	3/4"	
	8'									
	10'									
	4 5'									
12"	6'	11 %"	10 ¾"	7 5/8"	6 %"	10 ½"	2 ½"	1 1/2"	1 1/4"	
'-	4' 5' 6' 8'	11 78	10 /8	, , , ,	0 78	10 /2	L /2	1 /2	1 /4	
	10'									
	5'									
16"	4' 5' 6' 8'	15 %"	14 %"	11 %"	10 %"	10 ½"	2 ½"	1 ½"	1 1/4"	
	8'									
	10'									
	4' 5'									
20"	5' 6' 8'	19 %"	18 ¾"	13 %"	12 ¾"	10 ½"	2 ½"	1 1/2"	1 1/4"	
20	8'	13 /8	10 /8	10 /	12 /0	10 /2	L /2	1 /2	1 /4	
	10'									
	10' 4' 5'									
	5'									
24"	6' 8'	23 %"	22 %"	15 %"	14 %"	10 ½"	21/2"	1 ½"	1 1/4"	
	10'									

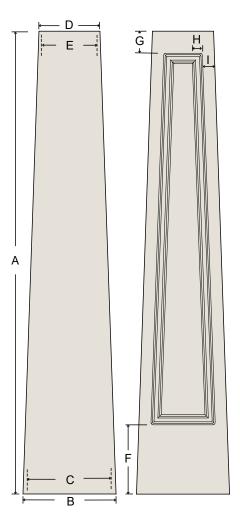

Custom sizes may be requested, up to 24' in height, and up to 48" width.

POLY-CLASSIC® CRAFTSMAN TAPERED CAP AND BASE STYLES

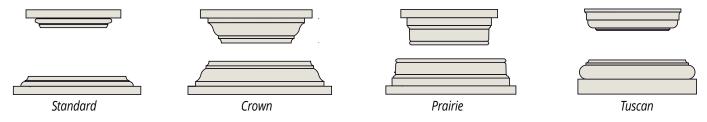

	Standard				Crown				Prairie				Tuscan			
Column	Ва	se	Сар		Base		Cap		Base		Ca	ıp	Base		Cap	
nominal bottom	Outside width	Inside width *	Outside width	Inside width *	Outside width	Inside width *	Outside width	Inside width *	Outside width	Inside width *	Outside width	Inside width *	Width †	Height	Width †	Height
width	(A	()	(E	3)	(A	()	(E	3)	(A	۸)	(E	()	(A)	(C)	(B)	(D)
10"	13 %"	5 %"	9 5/8"	3 %"	15 %"	5 %"	11 %"	3 %"	13 %"	5 %"	9 5/8"	3 %"	13 ½"	5 1⁄4"	9 ½"	3 9/16"
12"	15 %"	7 %"	11 %"	3 %"	17 %"	7 %"	13 %"	3 %"	15 %"	7 %"	11 %"	3 %"	17"	6"	13"	3 %"
16"	19 %"	11 %"	15 %"	3 %"	21 %"	11 %"	17 %"	3 %"	19 %"	11 %"	15 %"	3 %"	20 %"	7 ½"	17 ¾"	5"
20"	23 %"	13 %"	17 %"	3 %"	25 %"	13 %"	19 %"	3 %"	23 %"	13 %"	17 %"	3 5/8"	24 %"	7 ½"	20 1⁄4"	5"
24"	27 %"	15 %"	19 %"	3 %"	29 %"	15 %"	21 %"	3 %"	27 %"	15 %"	19 %"	3 %"	28 %"	7 ½"	22 ¾"	5"

^{*} Please specify if you require a larger inside width – option only available on 12" and larger caps.

Note: The total height of the parts (shown in the charts) do NOT add to the overall height of the column. The bottom and top plates do add 1" each (2" total) to the shaft height, allowing extra flexibility in installation.

[†] Dimensions (except width) also apply to recessed panel shafts.

[‡] Dimension shown is for standard shafts. On custom height columns the panels start 5 1/4" from the bottom.

^{*} Actual shaft height is 1/2" less than shown.

[†] Cap and base widths are shown as maximum. Widths may be reduced when adjusted for tapers on different heights. Please request drawings if needed to determine exact width.

POLY-CLASSIC® CRAFTSMAN NON-TAPERED SQUARE


	Shaft din	nensions	Panel a spac	nd flute ing †	Pan	els†	Flutes		
Nominal	Net bottom width	Inside bottom width	From bottom of shaft ‡	From top of shaft	From side of shaft	Width of routed channel	Number	Flute	
width	(B)	(C)	(D)	(E)	(G)	(F)	of flutes	width	
6"	5 %"	4 %"	16 ¾"	8 ½"	1 1/4"	3/4"	20	1/2"	
8"	7 %"	6 %"	16 ¾"	8 ½"	1 ½"	1 1/4"	20	3/4"	
10"	9 %"	8 %"	16 ¾"	8 ½"	1 ½"	1 1/4"	20	1"	
12"	11 %"	10 ¾"	16 ¾"	8 ½"	1 ½"	1 1/4"	20	1 1/4"	
14"	13 %"	12 ¾"	16 ¾"	9"	2"	1 1/4"	24	1 1/4"	
16"	15 %"	14 ¾"	16 ¾"	9 1/4"	2 1/4"	1 1/4"	28	1 1/4"	
18"	17 %"	16 ¾"	16 ¾"	9 ½"	2 ½"	1 1/4"	32	1 1/4"	
20"	19 %"	18 ¾"	16 ¾"	9 ¾"	2 3/4"	1 1/4"	36	1 1/4"	
22"	21 %"	20 %"	16 ¾"	10"	3"	1 1/4"	40	1 1/4"	
24"	23 %"	22 ¾"	16 ¾"	10 1/4"	3 1/4"	1 1/4"	44	1 1/4"	

[†] Dimensions except width also apply to recessed panel shafts.


Nominal	S	tanda	ard siz	zes (۹)	
column width	4'	5'	6'	8'	10'	
6"	√	√	√	√	\ \	ı
8"	√	√	√	√	\ \	
10"					/	Ш
12"	V	V	V	V	\ \	П

Nominal	Standard sizes (A)									
column width	8'	10'	12'	14'	16'	18'	20'	22'	24'	
14"										
16"		\vee	\vee	\vee	\vee					
18"	\ \					\vee				
20"	√	\vee	\vee	\vee	\vee	\vee	\vee			
22"	√	√	√	√	√	√	√	√		
24"										

Custom widths and heights may be requested in any size up to 24' tall and 48" wide. Cap and base trim and platforms will be adjusted as needed for the revised shaft width.

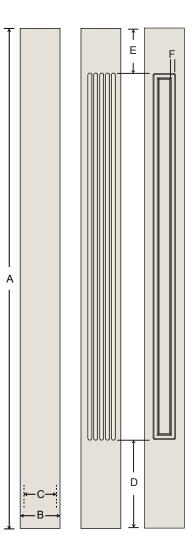

POLY-CLASSIC® CRAFTSMAN NON-TAPERED CAP AND BASE STYLES

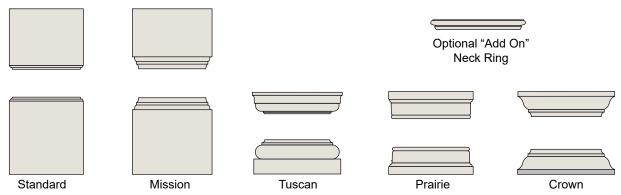

	Standard	Mission		Tuscan c		Prairie	Crown	
Column	cap & base	cap & base	Ва	se	C	ар	cap & base	cap & base
nominal	width	width	Width	Height	Width	Height	width	width
width	(A)	(A)	(A)	(B)	(C)	(D)	(A)	(A)
6"	6 %"	7 %"	8"	3 7/32"	8 1/16"	2 1/32"	8 1/8"	9 %"
8"	8 %"	9 5%"	11 ¾"	4 1/4"	11 1/4"	2 11/16"	10 1/3"	11 %"
10"	10 %"	11 %"	13 ½"	5 1/4"	13 ⁷ / ₃₂ "	3 1/16"	12 1/3"	13 %"
12"	12 1/8"	13 %"	17"	6"	17 1/4"	3 %"	14 1/8"	15 %"
14"	14 %"	15 %"	18 %"	7 ½"	19"	5"	16 1/8"	17 %"
16"	16 %"	17 %"	20 %"	7 ½"	21"	5"	18 1/8"	19 %"
18"	18 %"	19 %"	22 %"	7 ½"	23"	5"	20 1/8"	21 %"
20"	20 %"	21 %"	24 %"	7 ½"	25"	5"	22 1/8"	23 %"
22"	22 1/8"	23 %"	26 %"	7 ½"	27"	5"	24 1/8"	25 %"
24"	24 %"	25 %"	28 %"	7 ½"	29"	5"	26 1/8"	27 %"

Turncraft.com 31 |

[‡] Dimension shown is for standard shafts. On custom height columns the panels/flutes start 4" from the top of the base selected, and dimension (G) from the cap (or optional neck moulding).


POLY-CLASSIC® CRAFTSMAN PEDESTALS AND NEWELS





	Shaft ¹	widths		nels ard trim)		nels e trim)	Par	nels							
Nominal	Outside	Inside	From bottom of shaft	From top of shaft	From bottom of shaft	From top of shaft	Width of router channel	From side of shaft			Avail	able he	eights		
width	(B)	(C)	(D)	(E)	(D)	(E)	(F)	(G)	32"	36"	40"	44"	48"	54"	60"
6"	5 %"	4 %"	4 3/4"	3 ¾"	4 3/4"	2 %"	3/4"	1 1/4"	1	1	√	V	1	1	\ \
8"	7 %"	6 %"	4 3/4"	3 ¾"	4 3/4"	2 %"	1 1/4"	1 ½"	√	1	√	1	V	1	
10"	9 %"	8 %"	4 ¾"	3 ¾"	4 ¾"	2 1/8"	1 1/4"	1 ½"	1	1	$$	√	1	1	
12"	11 5/8"	10 ¾"	4 3/4"	3 ¾"	4 ¾"	2 1/8"	1 1/4"	1 ½"	1	1	√	√	1	1	1
14"	13 %"	12 ¾"	5 1/4"	4 1/4"	5 1/4"	3 1/8"	1 1/4"	2"	1	√	√	√	1	√	1
16"	15 %"	14 ¾"	5 ½"	4 ½"	5 ½"	3 ¾"	1 1/4"	2 1/4"	√	√	√	1	√	√	\ \
18"	17 %"	16 ¾"	5 3/4"	4 ¾"	5 ¾"	3 %"	1 1/4"	2 ½"	√	1	√	√	1	1	\ √
20"	19 5/8"	18 ¾"	6"	5"	6"	3 %"	1 1/4"	2 ¾"	1	1	√	1	V	1	√
22"	21 %"	20 %"	6 1/4"	5 1/4"	6 1/4"	4 1/8"	1 1/4"	3"	1	1	√	√	1	1	√
24"	23 5/8"	22 ¾"	6 ½"	5 ½"	6 ½"	4 %"	1 1/4"	3 1/4"	1	1	1	V	1	1	√
26"	25 %"	24 %"	6 ¾"	5 ¾"	6 ¾"	4 %"	1 1/4"	3 ½"	1	1	√	1	1	1	√
28"	27 %"	26 ¾"	7"	6"	7"	4 1/8"	1 1/4"	3 ¾"	√	1	1	1	1	V	
30"	29 %"	28 ¾"	7 1/4"	6 ¼"	7 1/4"	5 1/8"	1 1/4"	4"	1	V	V	V	1	V	V

^{*} Typically, pedestals are 4" wider than the column it is supporting, or about the same width as the base of the column which it supports.

POLY-CLASSIC® CRAFTSMAN PEDESTALS AND NEWEL CAPS AND BASES







Pyramid Cap


	Standa	rd Trim		Prairie	e Trim		Pyram	id Cap
Column nominal	Width	Height	Base width	Base height	Top height	Top width †	Cap height ± 1/16"	Cap width
width	(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)
6"	6 %"	3 1/4"	8 1/8"	3 1/4"	2 1/8"	7 %"	2 1/16"	7 %"
8"	8 %"	3 1/4"	10 1/8"	3 1/4"	2 1/8"	9 5%"	2 ½"	9 %"
10"	10 %"	3 1/4"	12 1/8"	3 1/4"	2 1/8"	11 %"	2 %"	11 1/8"
12"	12 %"	3 1/4"	14 1/8"	3 1/4"	2 1/8"	13 %"	3 1/4"	13 %"
14"	14 %"	3 1/4"	16 1/8"	3 1/4"	2 1/8"	15 %"	3 %"	15 %"
16"	16 %"	3 1/4"	18 1/8"	3 1/4"	2 1/8"	17 ¾"	4"	17 %"
18"	18 ¾"	3 1/4"	20 1⁄8"	3 1/4"	2 1/8"	19 %"	4 ¾"	19 %"
20"	20 %"	3 1/4"	22 1/8"	3 1/4"	2 1/8"	21 %"	4 13/16"	21 %"
22"	22 1/8"	3 1/4"	24 1/8"	3 1/4"	2 1/8"	23 %"	5 3/16"	23 %"
24"	24 %"	3 1/4"	26 1/8"	3 1/4"	2 1/8"	25 %"	5 %16"	25 %"
26"	26 %"	3 1/4"	28 1/8"	3 1/4"	2 1/8"	27 %"	6 5/16"	27 %"
28"	28 ¾"	3 1/4"	30 1/8"	3 1/4"	2 1/8"	39 %"	6 ¾"	29 %"
30"	30 %"	3 1/4"	32 1/8"	3 1/4"	2 1/8"	41 %"	6 ¾"	31 %"

800-423-3311

POLY-CLASSIC® CRAFTSMAN ORNAMENTAL CAPITALS

Designed with crisp, true architectural detail, Ornamental Capitals artfully capture natural themes and images. Capitals for square Nontapered Poly-Classic® Craftsman columns are crafted from poly/resin, and will ship split in half (to reassemble around the load support). Each style is proportionally scaled for the width of the shaft. The Empire with Necking, Greek

Erectheum with Necking, Modern Composite, Roman Corinthian, Roman Doric Ornamental, and Temple of Winds capitals will fit more accurately when the optional neck moulding is included. Since the shafts will be manufactured to be correct with the selected capital, there is no need to worry about a height adjustment value with PVC columns. Larger sizes may be available.

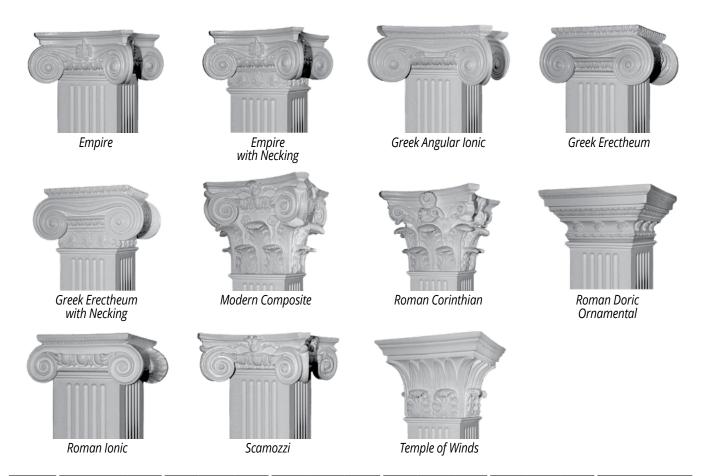


Shaft nominal	Empire			Empire with necking			Greek Angular Ionic			Greek Erectheum			Greek Erectheum with necking			Modern Composite		
bottom diameter		Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width
6"	3 ¾"	10"	9"	7 ¾"	10"	9"	n/a			3¾"	7 ¾"	11 ¾"	5 ¾"	7 ¾"	11 ¾"	8 ½	10 ¾	n/a
8"	5 1/4"	13 ½"	22 1/4"	10"	13 ½"	12 1/4"	5 1/8"	14 1/4"	13 ¾"	5 1/4"	10 ½"	15"	7 ½"	10 ½"	15"	11 ½	16 ½	n/a
10"	6 1/4"	18"	17"	11"	18"	17"	6"	17 1/4"	17"	6 1/4"	14 1/2"	21"	9 1/2"	14 ½"	21"	14 ½	19	n/a
12"	7 1/4"	20 1/4"	19 ½"	14 ½"	20 ½"	19 ½"	7 1/4"	20 ¾"	19 1/4"	6 ¾"	15"	20 ½"	11 1/4"	15"	21"	17	20	n/a
14"	8 ¾"	23"	19 ½"	17"	17" 23" 19 ½"		8 ¾"	20 ½"	19 ½"	9"	17 ½"	26"	13 ½"	17 ½"	26"		n/a	
16"	10"	32"	26 1/4"	n/a			9 ¾"	24 1/4"	19 ¾"	10"	22 ½"	29"	15"	22 ½"	29"	22 ½	25	n/a
18"	11 1/4"	34"	28"	n/a			n/a			11"	26"	36"	17"	26"	36"	n/a		
20"	12 ¾"	35 ½"	35"	19"	35 ½"	35"	12 ¾"	35"	34 ½"	13"	30 ½"	43"	19"	30 ½"	43"		n/a	

Shaft nominal bottom diameter	Roman Corinthian			Roman Doric Ornamental			R	oman lon	ic	Scamozzi			Temple of Winds		
	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width	Capital height	Abacus width	Scroll width
6"	8 ½"	12"	n/a	4 ½"	10 ½"	n/a	3"	8 1/4"	10 ½"	2 1/8"	10"	8"	7 ½"	10 ½"	n/a
8"	12"	15"	n/a	6"	14 1/4"	n/a	3 %"	10 ½"	13 ½"	3 ½"	11"	9 %"	10"	13 %"	n/a
10"	14 ½"	18 ½"	n/a	7"	16 1/4"	n/a	4 1/2"	12 ½"	16 ½"	4 1/8"	16 ¾"	14"	11 %"	16 %"	n/a
12"	17"	22"	n/a	9"	21"	n/a	5 ½"	17 ½"	23"	5 ½"	19"	16 ¾"	16"	19"	n/a
14"	20"	27"	n/a	10 ½"	24"	n/a		n/a		6 1/4"	22 1/4"	18 ½"	16"	23"	n/a
16"	23"	33 ½"	n/a	12 ½"	28"	n/a	6 ½"	20"	24 1/4"	7 ½"	25"	20 1/4"	18 1/8"	26 ¾"	n/a
18"	25 ½"	39"	n/a		n/a		8 ¾"	25"	31 ¾"	8 ¾"	26"	21 ½"	21 ½"	28"	n/a
20"	28 ½"	42"	n/a	n/a			9"	25 1/4"	33"	10 1/4"	34 1/4"	29 ½"	23 1/4"	34 ½"	n/a

Turncraft.com 33 |


MIX-N-MATCH

CRAFTSMAN SERIES COLUMNS WITH CRAFTSMAN SERIES PEDESTALS

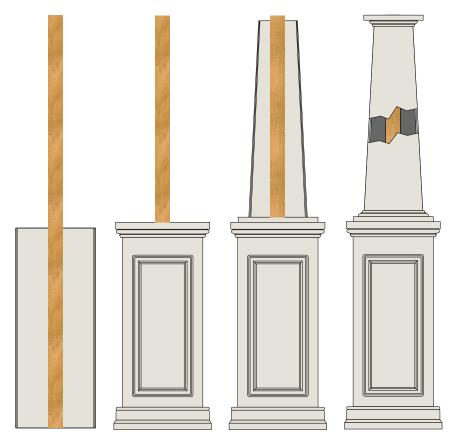

Columns are installed around an existing load-bearing support (pressure treated post, steel pole, etc).


- 1. Assemble three sides of the pedestal and slide in place around the structure.
- 2. Install final piece of pedestal around structure.
- Install pedestal trim and top plate on pedestal.
- 4. Assemble 3 sides of column and place on pedestal around structure.
- 5. Install final piece of column around structure.
- 6. Install column cap and base around column and secure to beam and to pedestal.

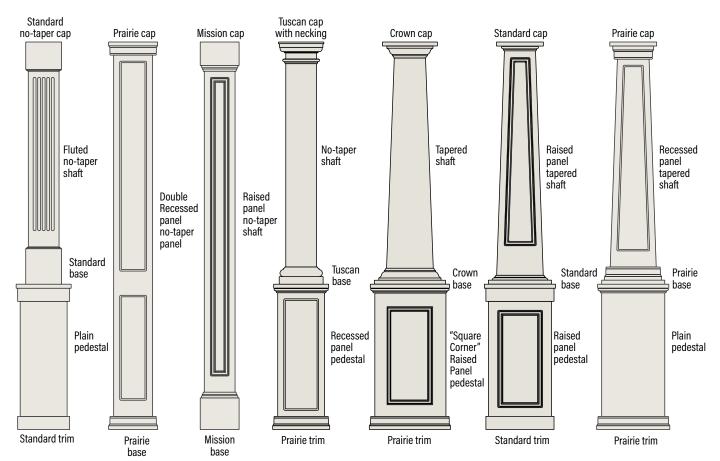

| 34

MIX-N-MATCH

CRAFTSMAN SERIES PEDESTALS WITH POLY-CLASSIC® FRP COLUMNS

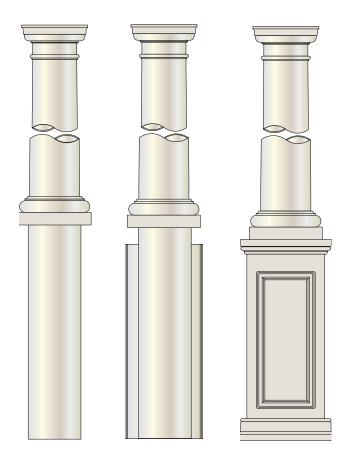

No load support is required, since the FRP column is load bearing (unless split).


The column should be installed following our normal installation instructions, with the exception that the base is not attached: the base should temporarily be held above the height of the pedestal.

The Craftsman pedestal is then assembled around the FRP column, and the pedestal trim installed following the typical pedestal installation instructions.

Following the pedestal assembly, the column base is lowered to the top of the pedestal and attached.

Pedestals can also be installed around existing columns to update and freshen the look.

Please specify if your column is round or square, as well as the width, so that we can correctly cut out the top platform of the pedestal to install around your column.

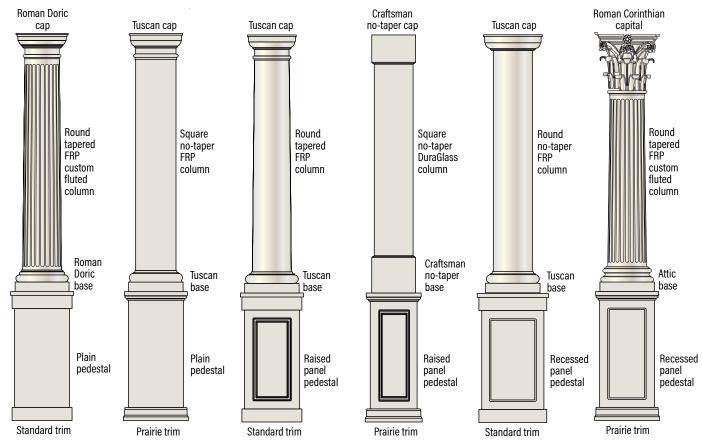

Turncraft.com 35 |



TURNCRAFT


ARC Architectural Series

- ARCHITECTURALLY CORRECT DETAILS
- ALL ORDERS OF CLASSICAL COLUMNS
- CORRECT PROPORTIONS OR CUSTOM DESIGNS
- INTERIOR AND EXTERIOR

- WIDEST RANGE OF STYLES AND SIZES
- ANY WOOD SPECIES
- FACTORY OPTIONS INCLUDE PRIMING AND ASPHALT COATING
- CEDAR COLUMNS HAVE A 10 YEAR LIMITED WARRANTY

| 36 | 800-423-3311

Comparison of the Orders

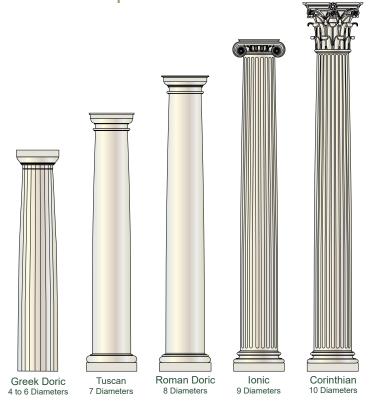

Turncraft Architectural wood columns are our premier product for precise attention to detail both in design and quality. Unlike FRP columns, where the manufacturing processes dictate some alterations to details, our wood columns are closest to true architectural specifications such as proportion, fluting and entasis (taper or bow).

Architectural columns are best proportioned when following the suggestions of William Ware (The American Vignola), Robert Chitham (The Classic Orders of Architecture), Palladio and others to emulate the ancient architecture of Greece and Rome. The illustration "Comparison of the Orders" shows how the height and diameter ratio affects columns of a similar diameter. Tip: to determine the correct diameter for a column in the height you need, simply divide the height by the diameter factor given below the style chosen. For example, at a two-story height of 198", an Ionic column (9 diameters) should be 22" in diameter (198/9=22), or a Tuscan column (7 diameters) should be 28" in

diameter.


In addition to the round columns shown, Turncraft Architectural can provide wood columns in non-architectural proportions, in many plan types, including squares, octagons and pilasters, either straight or tapered, as well as coupled columns, and other custom configurations.

Using our computerized lathes, our wood columns typically have the correct column entasis (taper

or bow) – the lower one-third of the shaft is straight, and the upper two-thirds has a diminishing taper. The "Entasis Taper" illustration shows precisely how this is generated. We also have the ability to customize the shaft taper. For example, straight tapers are common, as well as barrel columns where the center of the shaft is larger than both ends.

For exterior use, the recommended wood for shafts is cedar because of it's inherent resistance to insects and wood rot, and carries a ten year limited warranty. Pine is also available, with a one year limited warranty. Cap and base for

exterior columns are usually polyurethane (up to 16" columns) or fiberglass (18" and larger).



Cherry

For interior use, Turncraft is able to manufacture columns from a wide variety of woods. Paint grade woods are typically finger-jointed pine or poplar, and


stain grade can be practically any species imaginable.

Our most popular stain grade species are red oak, mahogany, cherry, maple, alder, and walnut. The examples here show the differences in grain and color. However it's best to keep in mind that the finish used affects the final color, so this isn't an exact match.

Red Oak Walnut Alder

Mahogany

Maple

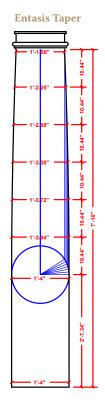



Turncraft.com 37 |

GREEK DORIC SPECIFICATIONS

Available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions or in custom combinations of column lengths and widths as well

as in non-tapered cylinders. Square architectural columns and pilasters to match detail of round tapered columns are available.

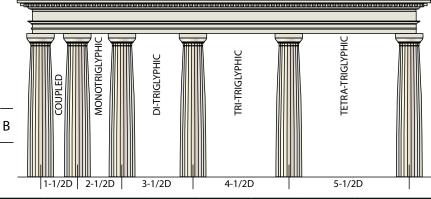




			Shaft Spe	cifications			C	ap Specific	cations
	Bot	tom	· ·	р	Flu	tes	Specifi	'	Materials
Shaft nominal bottom		Net		Net			Abacus width	Cap height	
diameter	Net O.D.	I.D.	Net O.D.	I.D.	Number	Width	(A)	(B)	<u>W</u> ood
6"	6"	2 1/4"	5"	2"	20	1 5⁄16"	7 %"	2 11/16"	W
8"	8"	4 1/4"	6 ½"	3 ½"	20	1 1/4"	9 1/4"	3 5/16"	W
10"	10"	6 %"	8 1/4"	5 1/4"	20	1 %16"	11 %"	3 15/16"	W
12"	12"	7 %"	9 ¾"	6 ¾"	20	1 %"	13 ¾"	4 %"	W
14"	14"	10 1/3"	11 1/4"	8 1/4"	20	2 3/16"	16"	5 ½"	W
16"	16"	11 ½16"	12 ¾"	9 ¾"	20	2 ½"	18 1/8"	6"	W
18"	18"	12"	14 ½"	11 ½"	20	2 ¹³ / ₁₆ "	20 ½"	6 ¾"	W
20"	20"	14 1/4"	16"	13"	20	3 1/8"	22 %"	7 %"	W
22"	22"	16 1/4"	18"	15"	20	3 1/16"	25 1/4"	8 1/4"	W
24"	24"	18 ¼"	19 ½"	16 ½"	20	3 ¾"	27 1/4"	8 %"	W

TUSCAN SPECIFICATIONS

Available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions or in custom combinations of column lengths and widths as well as in nontapered cylinders. Square architectural columns and pilasters to match detail of round tapered columns are available.

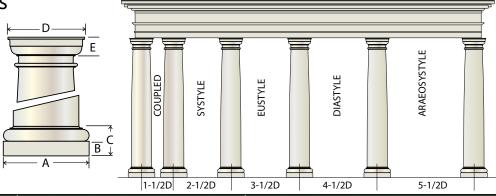




		S	haft Sp	ecificati	ons			Tuscar	n Cap ai	nd Base	Specific	ations
01.6	Bot	tom	To	op	Flute	es		Base		Ca	ıp	Materials
Shaft Nominal Bottom	Net	Net	Net	Net			Plinth width	Plinth height	Total height	Abacus width	Total height	<u>W</u> ood, Fiberglass,
Diameter	O.D.	I.D.	O.D.	I.D.	Number	Width	(A)	(B)	(C)	(D)	(E)	Polyurethane
4"	4"	0	3 1/4"	0	18	7/16"	5 %"	1"	2 5/16"	5 1/8"	1 3/16"	WP
6"	6"	3"	4 ¾"	2 ½"	24	1/2"	8"	1 ½"	3 1/4"	7 ½"	1 ¾"	WP
8"	8"	5 1/4"	6 ½"	4 %"	24	11/16"	10 ¾"	1 1/8"	4 1/4"	9 ¾"	2 ¾"	WP
10"	10"	7 1/4"	8 ½"	6 %"	24	7/8"	13 ¾"	2 3/8"	5 1/4"	12 1/3"	3"	WP
12"	12"	9"	10"	7 3/4"	24	1"	16 1/8"	2 3/4"	6"	14 ¾"	3 ¾"	WP
14"	14"	10 1/8"	12"	9"	24	1 1/4"	18 ¾"	3 %"	7 %"	17 1/3"	4"	WPF
15"	15"	11 ½6"	12 ¾"	10"	24	1 11/32"	20 1/8"	3 5/8"	7 %"	18 ¾6"	4 5/16"	WP
16"	16"	12"	13 ½"	10"	24	1 ½16"	21 ½"	3 %"	8 %"	19 1/4"	4 %"	WPF
18"	18"	14 1/4"	15"	12"	24	1 ½"	24 1/4"	4 1/4"	9 5%"	21 ½"	5 1/8"	WF
20"	20"	16 1/4"	17"	13"	24	1 1½16"	27"	4 3/4"	10 ¾"	24 1/4"	5 %"	WF
22"	22"	18 1/4"	18 ½"	15"	24	1 15/16"	29 ¾"	5 1/4"	12 1/8"	26 ½"	6 1/4"	WF
24"	24"	20 1/4"	20"	17"	24	2 1/8"	32 ½"	5 ¾"	13 1/4"	28 ¾"	6 %"	WF
26"	26"	22 1/8"	22"	19"	24	2 1/4"	35"	6 1/4"	14 ½"	31 ½"	7 %"	WF
28"	28"	24 1/8"	23 ½"	21"	24	2 11/16"	38"	6 ¾"	15 ½"	33 %"	8"	WF
30"	30"	26 1/4"	25"	22"	24	2 %"	40 ½"	7 1/4"	16 ½"	35 ¾"	8 5/8"	WF
32"	32"	27"	27"	23"	24	3"	42 ¾"	7 ¾"	17 ¾"	37 %"	9 1/4"	F
34"	34"	29"	28 ½"	24 ½"	24	3 1/4"	45 ½"	8 ½"	19 ¾"	41"	9 5/8"	F
36"	36"	31"	30"	26"	24	3 1/4"	48"	9"	20 %"	42 ¾"	10 ½"	F

ROMAN DORIC SPECIFICATIONS

Available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions or in custom combinations of column lengths and widths as well as in non-tapered cylinders. Square architectural columns and pilasters to match detail of round tapered columns are available

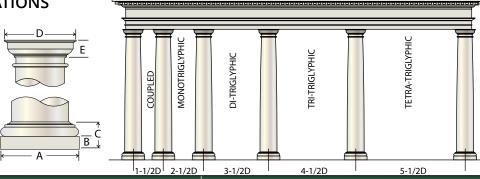





			Shaft Spe	cification	าร		F	Roman Do	ric Cap a	nd Base S	Specifica	ations
	Bot	tom	To	op	Flut	es		Base		Ca	ар	Materials
Shaft nominal bottom	Net	Net	Net	Net			Plinth width	Plinth height	Total height	Abacus width	Total height	<u>W</u> ood, <u>F</u> iberglass,
diameter	O.D.	I.D.	O.D.	I.D.	Number	Width	(A)	(B)	(C)	(D)	(E)	Polyurethane
4"	4"	0	3 ¼"	0	18	7∕ ₁₆ "	5 ¾"	1"	2 1/8"	5 1/8"	1 ½"	WP
6"	6"	3"	4 ¾"	2 ½"	24	1/2"	8"	1"	3 1/4"	7 ½"	2"	WP
8"	8"	5 1/4"	6 ½"	4 %"	24	¹ 1/ ₁₆ "	10 ¾"	1 1/8"	4 1/4"	9 ¾"	2 %"	WP
10"	10"	7 1/4"	8 ½"	6 %"	24	7/8"	13 ¾"	2 %"	5 %"	12 ½"	3 1/8"	WP
12"	12"	9"	10"	7 ¾"	24	1"	16 1/8"	2 3/4"	6 3/16"	14 ¾"	4"	WP
14"	14"	10 1/8"	12"	9"	24	1 1/4"	18 ¾"	3 ¾"	7 %"	17 ½"	4 11/16"	WPF
15"	15"	11 1/16"	12 ¾"	10"	24	1 11/32"	20 1/8"	3 %"	8 1/16"	18 ¹ / ₁₆ "	5 1/32"	WP
16"	16"	12"	13 ½"	10"	24	1 ½16"	21 ½"	3 %"	8 ¾"	19 1/8"	5 %"	WPF
18"	18"	14 1/4"	15"	12"	24	1 ½"	24 1/4"	4 1/4"	9 %"	22 1/4"	6"	WF
20"	20"	16 1/4"	17"	13"	24	1 11/16"	27"	4 3/4"	11"	25"	6 ¾"	WF
22"	22"	18 1/4"	18 ½"	15"	24	1 15/16"	29 ¾"	5 1/4"	12"	27 %"	7 %"	WF
24"	24"	20 1/4"	20"	17"	24	2 1/8"	32 ½"	5 ¾"	13 1/4"	29 ¾"	7 15/16"	WF
26"	26"	22 1/8"	22"	19"	24	2 1/4"	35"	6 1/4"	14 ¾"	32 ½"	8 11/16"	WF
28"	28"	24 1/8"	23 ½"	21"	24	2 11/16"	38"	6 ¾"	15 ¾"	34 %"	9 %"	WF
30"	30"	26 1/4"	25"	22"	24	2 1/8	40 ½"	7 1/4"	16 %"	37"	9 15/16"	WF
32"	32"	27"	27"	23"	24	3"	42 ¾"	7 ¾"	17 ¾"	39 1/4"	10 %16"	F
34"	34"	29"	28 ½"	24 ½"	24	3 1/4"	45 ½"	8 ½"	19 1/4"	42 1/8"	11 5/16"	F
36"	36"	31"	30"	26"	24	3 1/4"	48"	9"	20 1/4"	44 1/8"	12"	F

ROMAN IONIC SPECIFICATIONS

Available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions or in custom combinations of column lengths and widths as well as in nontapered cylinders.



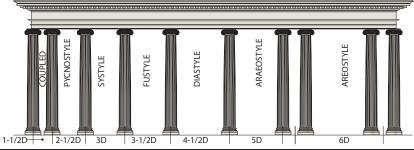



		<u></u>	iait Spe	ecilica	110115				base			Сар	
01 - 1	Bot	tom	To	р	Flut	tes	Attic Bas	se Specifi	ications	Materials	Romar Specific		Materials
Shaft Nominal Bottom	Net	Net	Net	Net			Plinth Width	Plinth Height	Total height	<u>W</u> ood, <u>F</u> iberglass,	Abacus Width	Capital Height	<u>W</u> ood,** Composite,
Diameter	O.D.	i.D.	O.D.		Number	Width	(A)	(B)	(C)	Polyurethane	(D)	(E)	Poly/Resin
6"	6"	3"	4 3/4"	2 ½"	24	1/2"	8"	1"	3 ½"	WP	6 1/8"	2 1/4"	WCP
8"	8"	5 1/4"	6 ½"	4 %"	24	¹ / ₁₆ "	10 ¾"	1 %"	5 1/8"	WP	8 1/4"	3"	WCP
10"	10"	7 1⁄4"	8 ½"	6 %"	24	7/8"	13 ¾"	2 %"	6 1/4"	WP	11"	3 %"	WCP
12"	12"	9"	10"	7 3/4"	24	1"	16 1/8"	2 ¾"	7 1/4"	WP	12 ½"	4 ½"	WCP
14"	14"	10 1/8"	12"	9"	24	1 1/4"	18 ¾"	3 %"	8 ¾"	WPF	17 ½"	5 ½"	CP
15"	15"	11 1/16"	12 ¾"	10"	24	1 11/32"	20 1/8"	3 5/8"	9 1/16"	WP	17 ½"	5 ½"	CP
16"	16"	12"	13 ½"	10"	24	1 ½16"	21 ½"	3 %"	10 1/8"	WPF	17 ½"	6 1/8"	CP
18"	18"	14 1/4"	15"	12"	24	1 ½"	24 1/4"	4 1/4"	11 ¾"	WF	20"	6 ½"	CP
20"	20"	16 1/4"	17"	13"	24	1 11/16"	27"	4 ¾"	12 %"	WF	20"	6 ½"	CP
22"	22"	18 1/4"	18 ½"	15"	24	1 15/16"	29 ¾"	5 1/4"	14 1/4"	WF	25"	8 ¾"	CP
24"	24"	20 1/4"	20"	17"	24	2 1/8"	32 ½"	5 ¾"	15 ½16"	WF	25 1/4"	9"	С
26"	26"	22 1/8"	22"	19"	24	2 1/4"	35"	6 1/4"	16 %"	WF	26 ½"	9 ½"	С
28"	28"	24 1/8"	23 ½"	21"	24	2 11/16"	38"	6 ¾"	18 1/8"	WF	32"	12 ½"	С
30"	30"	26 1/4"	25"	22"	24	2 %"	40 ½"	7 1/4"	19 1/4"	WF	32"	12 ½"	С


^{*}Sizes shown for Roman Ionic Cap. See Ornamental Capital table for sizes of all available styles.


Turncraft.com 39 |

^{**}Not all capital styles available in wood, not all styles in all sizes.

ROMAN CORINTHIAN SPECIFICATIONS

Corinthian Columns are available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions or in custom combinations of column lengths and widths as well as in non-tapered cylinders. Square architectural columns and pilasters to match detail of round tapered columns are available.



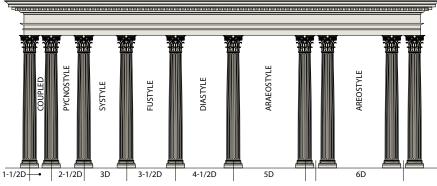



		SI	naft Spe	cificatio	ns			Roman	Corinthia	ın Base	Rom	an Corin	thian Cap
	Bot	ttom	To	op	Flute	es	Attic Ba	se Spec	ifications	Materials	Specifi	cations	Materials
Shaft nominal bottom	Net	Net	Net	Net			Plinth width	Plinth height	Total Height	Wood, Fiberglass,	Abacus width	Total height	<u>W</u> ood, Composite,
diameter	O.D.	I.D.	O.D.	I.D.	Number	Width	(A)	(B)	(C)	Polyurethane	(D)	(E)	Poly/Resin
6"	6"	3"	4 ¾"	2 ½"	24	1/2"	8"	1"	3 ½"	WPF	9 ½"	7"	WCP
8"	8"	5 1/4"	6 ½"	4 %"	24	11/16"	10 ¾"	1 1/8"	5 1/8"	WPF	12"	8 ½"	WCP
10"	10"	7 1/4"	8 ½"	6 %"	24	7/8"	13 %"	2 %"	6 1/4"	WPF	15"	12"	WCP
12"	12"	9"	10"	7 3/4"	24	1"	16 1/8"	2 3/4"	7 1/4"	WPF	18 ½"	14 ½"	WCP
14"	14"	10 1/8"	12"	9"	24	1 1/4"	18 ¾"	3 %"	8 ¾"	WPF	22"	17"	CP
15"	15"	11 1/16"	12 ¾"	10"	24	1 11/32"	20 1/8"	3 %"	9 1/16"	WPF	22"	17"	CP
16"	16"	12"	13 ½"	10"	24	1 ½16"	21 ½"	3 %"	10 1/8"	WPF	27"	20"	CP
18"	18"	14 1/4"	15"	12"	24	1 ½"	24 1/4"	4 1/4"	11 %"	WF	32 ½"	23"	CP
20"	20"	16 1/4"	17"	13"	24	1 ¹ / ₁₆ "	27"	4 ¾"	12 %"	WF	39"	25 ½"	CP
22"	22"	18 1/4"	18 ½"	15"	24	1 ¹⁵ ⁄ ₁₆ "	29 ¾"	5 1/4"	14 1/4"	WF	42"	28 ½"	CP
24"	24"	20 1/4"	20"	17"	24	2 1/8"	32 ½"	5 ¾"	15 ¹ / ₁₆ "	WF	42"	28 ½"	CP
26"	26"	22 1/8"	22"	19"	24	2 1/4"	35"	6 1/4"	16 %"	WF	42"	32"	С
28"	28"	24 1/8"	23 ½"	21"	24	2 11/16"	38"	6 ¾"	18 1/8"	WF	46"	34"	С
30"	30"	26 1/4"	25"	22"	24	2 1/8"	40 ½"	7 1/4"	19 1/4"	WF	46 ½"	37 ½"	С


CALCULATED SAFE-LOAD CAPACITIES

Diameter	Pine	Cedar	Available Heights*
6"	2,567 lb.	5,146 lb.	3' to 10'
8"	4,114 lb.	7,646 lb.	4' to 12'
10"	5,497 lb.	10,474 lb.	5' to 16'
12"	6,620 lb.	12,535 lb.	6' to 20'
14"	11,017 lb.	15,282 lb.	6' to 20'
16"	12,307 lb.	17,343 lb.	6' to 24'
18"	14,487 lb.	19,404 lb.	6' to 24'
20"	16,688 lb.	22,151 lb.	6' to 30'
22"	18,426 lb.	24,212 lb.	8' to 30'
24"	20,018 lb.	26,272 lb.	8' to 30'
26"	22,252 lb.	36,870 lb.	8' to 30'
28"	24,001 lb.	39,519 lb.	8' to 30'
30"	25,746 lb.	42,169 lb.	8' to 30'
32"	42,080 lb.	55,317 lb.	8' to 30'
34"	44,567 lb.	57,476 lb.	8' to 30'
36"	47,054 lb.	61,794 lb.	8' to 30'

The sample columns tested supported loads at least four times the calculated values to the left prior to failure. The load was applied concentrically through the axis of the column. Loads shown are valid only if there is uniform contact between the full area of column ends and the cap and base units. Loads are provided for your convenience only and are not exact values. Consult a structural engineer for the most accurate load estimates.

PLAN TYPES

Architectural Columns are available in the following plan types. Please specify when you order. Custom plan types are also available. (Fractional components shown are typical. Customer may specify actual returns, wall thicknesses, etc).

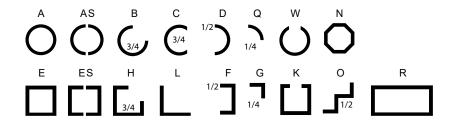

^{*} Custom sizes available on request.



ORNAMENTAL CAPITALS FOR ARCHITECTURAL WOOD COLUMNS

Shaft nominal		1 Empire			2 Empire th Neckir		3 Gre	ek Erect	neum	4	Scamozz	zi		ek Erectl th Neckir	
bottom width	Abacus width	Capital height	Scroll width	Abacus width	Capital height	Scroll width	Abacus width	Capital height	Scroll width	Abacus width	Capital height	Scroll width	Abacus width	Capital height	Scroll width
6"	9"	3 1/8"	8 ¾"	9"	6 %"	8 ¾"	6 ¾"	3 1/4"	8 ½"	7 ¾"	2 %"	6 1/4"		n/a	
8"	10"	3 ¾"	9"	10"	7 ¾"	9"	7 ¾"	4 ½"	11 ¾"	10 1/4"	3"	9"		n/a	
10"	16"	5 ½"	13 ½"	13 ½"	10"	12 1/4"	12"	5 ½"	17 ½"	16"	4 ½"	14"		n/a	
12"	18"	6 ¾"	17"	18"	11"	17"	14 ½"	6 1/4"	21"	17 ½"	5"	15 ½"	14 ½"	9 ½"	21"
14"	20 ½"	7 1/4"	19 ½"	20 ½"	14 ½"	19 ½"	15"	7"	21"	19 ½"	6"	16 ½"	15"	11 1/4"	21"
15"	23"	8 ¾"	19 ½"	20 ½"	14 ½"	19 ½"		n/a		19 ½"	6"	16 ½"	15"	11 1/4"	21"
16"	23"	8 ¾"	19 ½"	23"	17"	19 ½"	17 ½"	9"	26"	22 1/4"	6 1/4"	18 ½"	17 ½"	13 ½"	26"
18"	32"	10"	25 1/4"	32"	15"	26 1/4"	22"	10 1/4"	29"	25"	7 ½"	20 1/4"	22 ½"	15"	29"
20"	34"	11 1/4"	28"	34"	17 1/4"	28"	26"	11"	36"	28 ½"	8 ½"	24"	26"	17"	36"
22"	35 ½"	12 ¾"	35"	34"	17 1/4"	28"	26"	11 1/4"	36 1/4"	28 ½"	8 ½"	24"	26"	17"	36"
24"	35 ½"	12 ¾"	35"	35 ½"	19"	35"	30 ½"	13"	43"	34 1/4"	10 1/4"	29 ½"	30 ½"	19"	43"
26"	37"	13"	35"	37"	19"	35"	32 ½"	13"	43"	35 1/4"	11"	29 ¾"	32 ½"	19 ½"	43"
28"		n/a		37"	19"	35"	31"	15"	45 ½"	39"	12 ¾"	33"	31"	24 ¾"	45 ½"
30"		n/a			n/a		31"	15"	45 ½"	39"	12 ¾"	33"	31"	24 ¾"	45 ½"
36"		n/a			n/a		42 ½"	19 1/4"	60 ½"	46"	15"	38 ½"		n/a	

Shaft nominal	6 Ro Corin	man Ithian	7 Roma Ornam			odern posite	9 F	Roman lor	nic	10 Gree	ek Angula	ar Ionic	11 Ten Wir	nple of nds
bottom width	Abacus width	Capital height	Abacus width	Capital height	Abacus width	Capital height	Abacus width	Capital height	Scroll width	Abacus width	Capital height	Scroll width	Abacus width	Capital height
4"	n/	′a	n/a	a	n	/a		n/a			n/a		6"	6"
6"	9 ½"	7"	8 ¾"	4"	8"	7"	6 1/8"	2 1/4"	8 1/16"		n/a		8"	7"
8"	12"	8 ½"	13 1/8"	6"	10 ¾"	8 ½"	8 1/4"	3"	10 ½"	9 ½"	3 ¾"	9"	10 ½"	7 ½"
10"	15"	12"	14 1/4"	6 ¾"	16 ½"	11 ½"	11"	3 %"	13 %"	14 ½"	5 %"	13 1/4"	15 1/4"	11 1/8"
12"	18 ½"	14 ½"	16 ¼"	7"	19"	14 ½"	12 ½"	4 ½"	16 ½"	17 1/4"	6"	17"	16 %"	11 %"
14"	22"	17"	21"	9"	20"	17"	17 ½"	5 ½"	23"	20 ¾"	7 1/4"	19 1/4"	21 1/4"	14"
15"	22"	17"	24"	10 ½"	20"	17"	17 ½"	6 1/8"	22"	20 ½"	8 %"	19 ½"	21 1/4"	14"
16"	27"	20"	24"	10 ½"	n	/a	17 ½"	6 1/8"	22"	20 ½"	8 3/8"	19 ½"	23"	16"
18"	32 ½"	23"	28"	12 ½"	25"	22 ½"	20"	6 ½"	24 1/4"	24 1/4"	9 ¾"	19 ¾"	26 ¾"	18 1/8"
20"	39"	25 ½"	n/a	а	25"	22 ½"	25"	8 ¾"	31 ¾"	29 ¾"	11"	28"	28"	21 ½"
22"	42"	28 ½"	n/a	а	n	/a	25"	8 ¾"	31 ¾"	29 ¾"	11"	28"	34 ½"	23 1/4"
24"	42"	28 ½"	n/a	а	n	/a	25 1/4"	9"	33"	35"	12 ¾"	34 ½"	31 1/4"	28 ½"
26"	42"	32"	n/a	a	n	/a	26 ½"	9 ½"	33 ¾"	39 ½"	14 ¾"	38"	35"	24"
28"	46"	34"	n/a	а	n	/a	32"	12 ½"	40 ½"	39 ½"	14 ¾"	38"	37"	28"
30"	46 ½"	37 ½"	n/a	a	n	/a	32"	12 ½"	40 ½"	n/a			39"	30"
36"	55"	42"	n/a	а	n	n/a		n/a			n/a	n/a		



Plaster Ornamental Capitals are coated with boiled linseed oil and turpentine as a temporary protector until they can be primed and coated with at least two coats of oil-base paint on the inside and outside. (If capitals are allowed to gather moisture before painting, peeling is likely to occur and further coating will be futile.) Ornamental Capitals are shipped with a load-bearing plug, which must bear the weight of any load on the column. Specifications and materials are subject to change without notice. Poly/Resin Capitals are load bearing, and do not require plugs.

Exterior and paint-grade interior columns feature polyurethane or fiberglass caps and bases (see charts) to provide crisp, true architectural detail and increased durability. Special-order wood caps and bases are available. Optional aluminum plinths provide an extra measure of protection.

Turncraft.com 41 |



TURNCRAFT COL Colonial Column

- **READY TO INSTALL**
- WATER-REPELLENT TREATMENT
- AVAILABLE IN 6", 8", 10", AND 12"
- IN STOCK FOR IMMEDIATE SHIPMENT
- **READY TO PRIME AND PAINT**
- WOOD CAPS AND BASES **AVAILABLE FOR INTERIOR USE**
- **POLYURETHANE CAPS AND BASES AVAILABLE FOR EXTERIOR USE**
- TREATED WITH WOODLIFE® 111

| 42 800-423-3311

PRECISION CRAFTSMANSHIP

Turncraft Wood Colonial columns begin with the milling of finger-jointed or solid staves to exacting dimension. The staves are then assembled into a raw shaft using the strongest Type-I waterproof glue. Torque bands are wrapped around the shaft applying 90 to 100 pounds of pressure per square inch, transforming the individual staves into a single unit, ready for precision turning.

TREATED AND PROTECTED WITH WOODLIFE® 111

Non-primed wood Colonial paint grade exterior shafts (except redwood or cedar) are fully immersed in Woodlife® 111 wood preservative. Woodlife® 111 is formulated to protect against staining and decaying fungi, to control shrinking, swelling, end checking, splitting, grain raising, and warping for maximum compatibility with paint, primers, and topcoats. Woodlife® 111 also conforms to Industrial Standard I.S. 4-00, is approved by the N.W.W.D.A., and meets all current and proposed government standards.


UPON REQUEST:

<u>Priming</u> is applied in two coats, using a specially formulated primer developed exclusively for Turncraft. The column is sanded before each coat.

Asphalt coating of the shaft interior is applied to the bottom three feet of the shaft.

PLAN TYPES

Colonial columns are available in the following plan types. Please specify when you order. Columns other than Plan Type A are not load bearing. Split or reassembled columns are not load bearing.

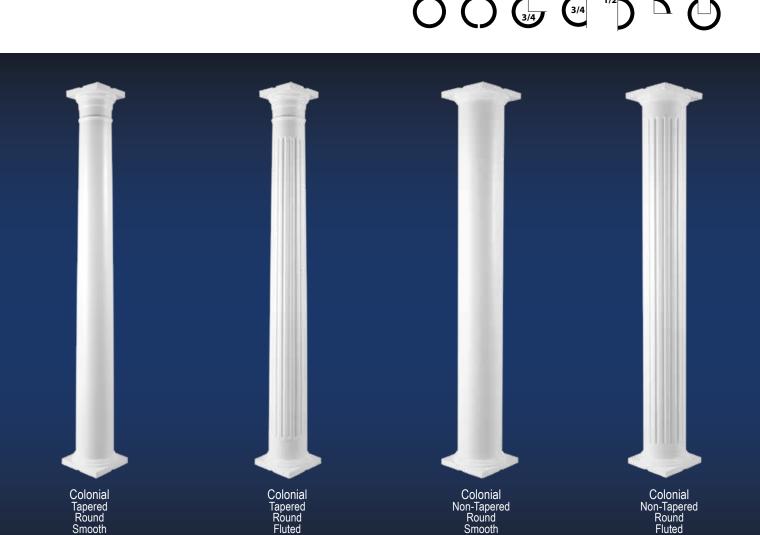

COLONIAL TAPERED COLUMN SPECIFICATIONS

			Shaft Dim	ensions		Fluti	ing Dime	ensions	Maximum
Nominal shaft	Available	Outside	diameter	Inside d	iameter	Number	Flutes	Flute length	Load (pounds)
diameter *		Bottom	Тор	Bottom	Тор	of flutes	width	(A)	Capacity
	6'							4'-2"	
6"	8' 10'	5 %	4 1/4	3	1 3/4	15	1/2	6'-2" 8'-2"	2,095 lb.
	12'							10'-2"	
	6'							4'-2"	
8"	8' 10'	7 1/8	6 1/4	5	3 ½	15	7/8	6'-2" 8'-2"	3,258 lb.
	12'							10'-2"	
	6'							4'-2"	
10"	8' 10'	9 5/8	8 1/4	7 1/8	5 ½	18	7/8	6'-2" 8'-2"	4,268 lb.
	12'							10'-2"	
	6'							4'-2"	
12"	8' 10'	11 %	10 1/4	9	7 ½	20	7/8	6'-2" 8'-2"	5,173 lb.
	12'							10'-2"	

^{*} Shaft net diameters are 3/8" less than nominal. ** For wood columns, inside sizes are based on the inside diameter of the polyurethane cap. Other caps (wood and ornamental capitals) have different sizes and these numbers will not apply.

	Taper	ed **
Column diameter	Inside round	Inside square
6"	1 ½"	1 1/16"
8"	3"	2 1/4"
10"	5"	3 %"
12"	7"	5"







Columns from 14" to 24" diameter are available.

Call for more information.

Turncraft manufactures a full selection of Colonial design columns in finger-joint western pine. Other species may be available upon request.

COLONIAL NON-TAPERED COLUMN SPECIFICATIONS

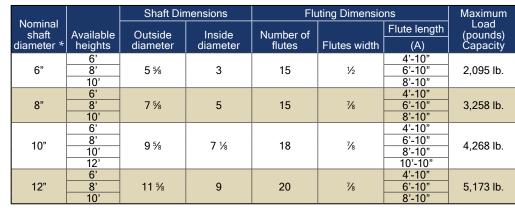



	Non-tap	ered **
Column diameter	Inside round	Inside square
6"	2 1/8"	1 %"
8"	4 5/8"	3 1/8"
10"	6 %"	4 ¾"
12"	8 5/8"	6"




Shaft Height

Total Height



Actual lengths of the flutes for standard configurations are shown in the accompanying tables.


The extra few inches above the base allow the installer to adjust heights as needed to accommodate the variations in porch heights and slopes. Custom flute lengths are available upon request, for the same price as standard fluted columns. Fluting typically ends 4" from the base on custom fluted columns. If using standard height columns with custom height columns, it is best to order the standard height columns custom fluted as well to match the 4" bottom spacing.

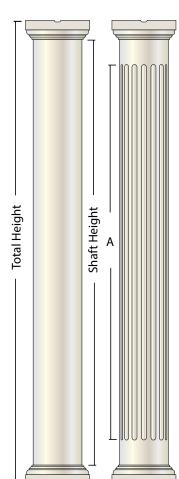


| 44


POLYURETHANE CAP AND BASE

	Tapered & Non-tapered Polyurethane Base				Ta _l	pered F	olyuret	thane C	Сар	Non-tapered Polyurethane Cap					
Column nominal	Plii	nth	Base round Base			Сар і	ound	Aba	Abacus Cap		Cap Round		Abacus		Сар
diameter *	Α	В	С	D	height	Е	F	G	Н	height	- 1	J	K	L	height
6"	8 1/8"	1 ½6"	6 1/8"	1 ½16"	2 %"	5 1/8"	1 ¾16"	6 ¾"	1 1/4"	2 1/16"	6 1/8"	1 ½6"	8 1/8"	1 ½16"	2 1/8"
8"	10"	1 ½16"	8"	1 ½16"	2 %"	6 ¾"	1 ¾16"	8 3/4"	1 1/4"	2 1/16"	8"	1 ½16"	10"	1 ½16"	2 1/8"
10"	12"	1 ½16"	10"	1 1/16"	2 %"	8 %"	1 ½16"	10 ½"	1 ½16"	2 %"	10"	1 ½16"	12"	1 ½16"	2 %"
12"	14"	1 ½16"	12"	1 ½16"	2 1/8"	10 ¾"	1 1/16"	12"	1 ½16"	2 1/8"	12"	1 ½16"	14"	1 ½16"	2 %"












WOOD CAP AND BASE

	Tapered & Non-tapered Wood Base				Tapered Wood Cap				Non-tapered Wood Cap						
Column nominal	Pli	nth	Base	round	Base	Cap r	ound	Aba	cus	Сар	Cap F	Round	Aba	cus	Сар
diameter *	Α	В	С	D	height	Е	F	G	Н	height	- 1	J	K	L	height
6"	8 1/8"	1 ½"	6 1/8"	1 ½"	3"	5 1/8"	1 1/4"	6 ¾"	1 1/4"	2 ½"	6 1/8"	1 ½"	8 1/8"	1 ½"	3"
8"	10"	1 ½"	8"	1 ½"	3"	6 ¾"	1 1/4"	8 3/4"	1 1/4"	2 ½"	8"	1 ½"	10"	1 ½"	3"
10"	12"	1 ½"	10"	1 ½"	3"	8 %"	1 ½"	10 ¾"	1 ½"	3"	10"	1 ½"	12"	1 ½"	3"
12"	14"	1 ½"	12"	1 ½"	3"	10 %"	1 ½"	12"	1 ½"	3"	12"	1 ½"	14"	1 ½"	3"











ORNAMENTAL CAPITALS FOR ROUND TAPERED COLONIAL COLUMNS



Nominal	Empire			E	Empire with Necking				Greek Angular Ionic			
	Capital height	Abacus width	Scroll width	Height adjust	Capital height	Abacus width	Scroll width		Capital height		Scroll width	Height adjust
6"	2 ½"	7 ½"	6 ¾"	-4 3/8"	5"	7 ½"	6 ¾"	-1 1/4"	2 ¾"	7 ½"	6 ¾"	-4 1/8"
8"	3 ¾"	10"	9"	-3 1/8"	7 ¾"	10"	9"	+1 1/2"	3 5/8"	9 1/4"	9"	-3 1/4"
10"	5 1/4"	13 ½"	12 1/4"	-2"	10"	13 ½"	12 1/4"	+3 ¾"	5 1/8"	14 1/4"	13 ¾"	-2 1/8"
12"	6 1/4"	18"	17"	-1"	11"	18"	17"	+4 3/8"	6"	17 1/4"	17"	-1 1/4"

12	0 74	10	17	- 1		0 1.	, , , , ,	/° U	17 74	17	-1 /4
Nominal	Greek Erectheum				Greek Erectheum with Necking				Modern Composite		
bottom diameter	Capital height	Abacus width	Scroll width	Height adjust	Capital height	Abacus width	Scroll width	Height adjust	Capital height	Abacus width	Height adjust
6"	3 1/4"	6 ¾"	8 ½"	-3 %"		n/	/a		6 ½"	7 ½"	+1/4"
8"	3 ¾"	7 ¾"	11¾"	-3 1/8"	5 ¾"	7 ¾"	11 ¾"	-1/2"	8 ½"	10 ¾"	+2 1/4"
10"	5 1/4"	10 ½"	15"	-2"	7 ½"	10 ½"	15"	+7/8"	11 ½"	16 ½"	+4 %"
12"	6 1/4"	14 ½"	21"	-1"	8 ½"	12"	17 1/4"	+1 1/8"	12 1/4"	16 ½"	+5 %"

For Empire with Necking, Greek Erectheum with Necking, Modern Composite, Roman Corinthian, and Temple of Winds capitals, trim at this point:	
For all other capital styles, trim at this point:	

Nor	minal	Roma	an Corin	thian	Roman	Doric C	Ornamental	Roman Ionic				Scarr	nozzi		Temple of Winds			
					Capital		_								_	Capital		
alar	neter	height	width	adjust	height	width	adjust	height	width	width	adjust	height	width	width	adjust	height	width	adjust
(6"	5 ¾"	7 %"	-1/2"	4"	8 ¾"	-2 1/4"	2 1/4"	6 1/8"	8 1/16"	-4 %"	2 ½"	6 ½"	5 1/4"	-4 %"	6"	6"	-1/4"
8	8"	8"	9 3/8"	+1 3/4"	4 ½"	10 ½"	-1 3/4"	3"	8 1/4"	10 ½"	-3 %"	2 1/8"	10"	8"	-4"	7"	8"	+3/4"
1	0"	11"	13"	+4 %"	6"	14 1/4"	- 5⁄8"	3 %"	10 ½"	13 ½"	-3 %"	3 ½"	11"	9 ¾"	-3 ¾"	10"	13 5/8"	+3 %"
1	2"	13 %"	17 ¾"	+7 1/4"	7"	16 1/4"	+3/8"	4 ½"	12 ½"	16 ½"	-2 3/4"	4 1/8"	16 %"	15 ⁵ / ₈ "	-2 3/8"	11 ³ / ₈ "	16 ½"	+4 ¾"

Turncraft.com 45 |



TURNCRAFT

SWC Square Wood Columns

- READY TO INSTALL
- STRUCTURAL, LOAD-BEARING
- **■** POST DEFENSE™ SEALER
- FACTORY SANDED AND PRIMED FOR EASY FINISHING

- **■** EASY TO ATTACH RAILINGS
- INCLUDES MULTIPLE CAP AND BASE OPTIONS
- DESIGNED FOR INTERIOR OR EXTERIOR USE
- LIMITED LIFETIME WARRANTY

| 46 | 800-423-3311





Special formulated end-seal added to the bottom of each column.





MISSION CAP & BASE

Size	Width	Height	Item #
4"	4 5/8"	3"	PW04
5"	5 5/8"	3"	PW05
6"	6 5/8"	3"	PW06
8"	8 1/4"	3"	PW08
10"	10 1/4"	3"	PW10





CROWN CAP & BASE

Size	Width	Height	Item #
6"	11"	3"	PW0406
8"	13"	3"	PW0408
10"	15"	3"	PW0410

$\textbf{POSTSAVER}^{\text{\tiny{TM}}}$

(required for warranty)

(required for warranty)										
Size	Width	Height	Item #							
4"	3 3/16"	3/4"	A2101							
5"	4 3/16"	3/4"	A2102							
6"	5 3/16"	3/4"	A2103							
8"	7"	5/8"	PW2104							
10"	9"	5/8"	PW2105							

MISSION CAP & BASE

Crown

Size	Width	Height	Item #
6"	7"	5 1/4"	PW1606
8"	9"	5 1/4"	PW1608
10"	11"	5 1/4"	PW1610



Mission

Prairie

PRAIRIE CAP & BASE

Size	Width	Height	Item #
6"	7 1/2"	3 1/4"	PW1206
8"	9 1/2"	3 1/4"	PW1208
10"	11 1/2"	3 1/4"	PW1210



TUSCAN CAP & BASE

Size	Width	Height	Item #							
6"	7 3/8"	3 1/4"	PW0206							
8"	10 3/4"	4 1/4"	PW0208							
10"	12 7/8"	5 1/4"	PW0210							





TURNCRAFT



- REAL WOOD TURNINGS
- SANDED AND PRIMED FOR EASY FINISHING
- SPECIAL SEALER APPLIED TO BOTTOM OF POSTS
- POST-SAVER™ FASTENERS

- POST DEFENSE™ LIMITED LIFETIME WARRANTY
- READY TO PAINT
- 4", 5" AND 6" SIZES
- 8', 9' AND 10' LENGTHS



Turncraft.com




24" 24" 24" 24" 14" 14" 40" 40" 40" 40" 40" 40" 56" 56" 44" 44" 42" 42" 10' 10' 9'

COLONIAL PORCH POST

Bottom width	Shaft height	Load capacity	Item number	
	8'	1,000	D3148A	
4"	9'	1,000	D3049A	
	10'	1,000	D3410A	
	8'	3,000	D3158A	
5"	9'	3,000	D3059A	
	10'	3,000	D3510A	
	8'	5,800	D3168A	
6"	9'	5,800	D3069A	
	10'	5,800	D3610A	

CHAMFERED PORCH POST

Bottom width	Shaft height	Load capacity	Item number
	8'	3,000	D8258AC
5"	9'	3,000	D8259AC
	10'	3,000	D8375AC
	8'	5,800	D8268AC
6"	9'	5,800	D8269AC
	10'	5,800	D8380AC

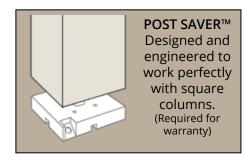

POSTSAVER™ (required for warranty)

	(
I	Size	Height	Item #		
ĺ	4"	3/4"	A2101		
ĺ	5"	3/4"	A2102		
ĺ	6"	3/4"	A2103		



POST TRIM KIT

The new PVC porch post Trim kit is designed to wrap around the porch




post and mounting (Post Saver™, plinth, etc.) for a finished look.

Visit Turncraft's Website

COLUMN BUILDER PDF CREATOR

Our interactive column builder will allow you to choose the column, capital and base of your choice. When you have designed the column you can save it to a PDF for printing. Take the PDF to your local Turncraft distributor for pricing and availability.

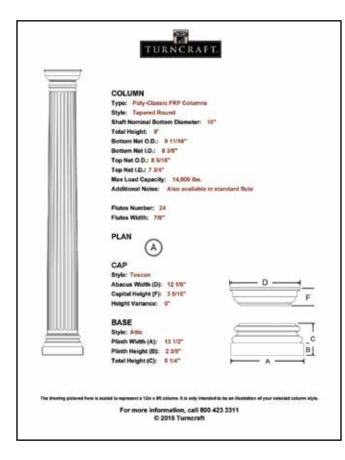

Column Builder also available for all IOS phones and tablets.



PHOTO GALLERY

View Turncraft products installed in various locations.

LITERATURE BROWSER

 Quick access to all the literature offered on Turncraft website.

ARCHITECT'S CORNER

Specifications and instructions for the architect.

PRODUCTS

You can select any of our product lines by clicking on the desired column.

- Turncraft Architectural Wood Columns
- Poly-Classic® FRP Columns
- DuraStone™ Columns
- DuraGlass™ Columns
- Craftsman Columns
- Porch Post
- Wood Colonial Columns
- · Wood Square Columns
- Wood Porch Posts

Clicking on the product tab will pull up all the information available for that particular product.

ADDITIONAL INFORMATION

All of the information available in PDF format will be available here

for your selection. Simply click on the desired PDF to view, save or print it out.

- Installation instructions
- Warranty information
- Specifications
- Catalog PDF

Turncraft Column Builder App Available in App Store





find us on:



| 50 | 800-423-3311

Quality at Every Turn

At Turncraft the quality starts with the materials.

As a division of Cascade Wood
Products, we have direct control
of the raw materials used in our
wood products. Unlike other column
manufacturers, our ability to monitor
materials at each step of the process
ensures every Turncraft wood column
will offer both the natural beauty
and the quality needed to stand
the test of time. Quality control is
further improved by using specialized
machinery unique to each product line.
By keeping our manufacturing facilities



separate, we can better monitor, control and improve how well and how efficiently all of our products are constructed.

CREATING BEAUTY IS AN EXACTING PROCESS.

For Architectural Series columns, finger-jointed* or solid staves are milled to required dimensions, assembled using the strongest Type-I waterproof glue, then metal-banded for curing. A computer-controlled lathe turns the assembled shaft to the precise taper desired, complete with true architectural entasis. The top is profiled, the entire column is machine sanded and flutes are milled at precise intervals and depths, ending in half-rounds at the top and bottom (except on Greek Doric).

ALTERNATIVE BUILDING MATERIALS.


Turncraft has responded to the growing demand for alternative building materials. In 1994, we introduced our Poly-Classic® line of fiberglass-reinforced polymer (FRP) columns to offer customers a more versatile and durable alternative. In 2005, we added the Poly-Classic® Craftsman line—a popular design made of expanded cellular PVC for easy assembly and virtually maintenance-free performance.

CUSTOM SOLUTIONS.

Turncraft.com

While Turncraft offers an extremely diverse lineup of products in more sizes and styles, we are also here to serve your imagination. With our access to the finest building materials, if you can dream it we can build it for you.



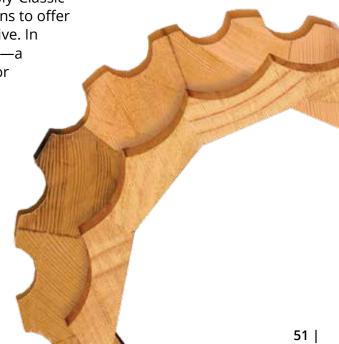

^{*} Using finger-jointed pieces conserves wood resources, reduces potential for warping and bow, and helps prevent checking or cracking of finished surfaces.



Beauty. Value. Performance.

Turncraft's long history of high-quality craftsmanship is reflected in its entire product line, designed to add elegance and value to any building project.

Turncraft is your best source for:


- Poly-Classic® FRP Columns
- Poly-Classic® DuraStone™ Columns
- Poly-Classic® DuraGlass™ Columns
- Poly-Classic® Craftsman Series Columns
- Poly-Classic® Porch Posts
- Turncraft Architectural Columns
- Wood Colonial Columns
- Wood Square Columns
- Wood Porch Posts

For detailed information on Turncraft's complete product line, please visit our website

Turncraft.com

PO Box 2429
White City, Oregon 97503
T 541 826 2911
F 541 826 1393
info@turncraft.com

distributed by:

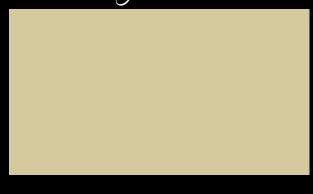

©2017 Turncraft. All rights reserved. Turncraft and Poly-Classic® are registered trademarks of Cascade Wood Products, Inc. Post Defense™ is a trademark of Cascade Wood Products, Inc. All other trademarks mentioned herein are the property of their respective owners. Information and specifications in this catalog are subject to change without notice.

